

RGM Double Connector**Description**

Double swivel body metal fitting with nickel-plated brass metal inner bushes for connecting flexible conduits type TM, Ecoflex®, TFA and TM-PVC. Self-extinguishing polyamide 6 insulating outer body. IP65 protection rating. Available in grey (RAL 7035).

Advantages

It has a metal body and inner sleeve, thus facilitating connection with the metal interior of TM-PVC, Ecoflex and TM conduits, maintaining the electrical continuity of the system.

Double body that allows the connection of flexible conduits with a metal body and a plastic cover.

It has an independent rotating body for both sides that allow the connection of the fitting to the conduit for later connection to the box.

CE conformity in accordance to the low voltage directive 2014 /35 /UE and the international and harmonized product standard IEC 61537

Applications

Suitable for connecting TM, TM-PVC and Ecoflex® flexible metal conduits for electrical cable routing for building, service and industrial applications.

Solutions

RGM Double Connector

2/4

Main technical characteristics

LTN	Nickel-plated brass	COLOUR Grey RAL 7001	DN NW 7, NW 9, NW11, NW13, NW16, NW21, NW29, NW36, NW48	
LATÓN NIQUELADO, POLIAMIDA 6	IP65	-25 / 105 °C	LIBRE DE HALÓGENOS, NO PROPAGADOR DE LA LLAMA	ETIM 10 EC001178

Product data

DN	Ø	L _{mm}	Ref	kg/u	kg
NW 7	7.2	48	82002540	0,017	50
NW 9	9.2	52	82002568	0,024	50
NW11	12.2	59	82002569	0,033	25
NW13	14.3	62	82002570	0,040	25
NW16	15.8	64	82002571	0,048	15
NW21	21	76	82002572	0,085	15
NW29	28.5	91	82002573	0,143	5
NW36	37	99	82002574	0,220	4
NW48	49.7	109	82002575	0,272	3

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



RGM Double Connector

3/4

Product applications

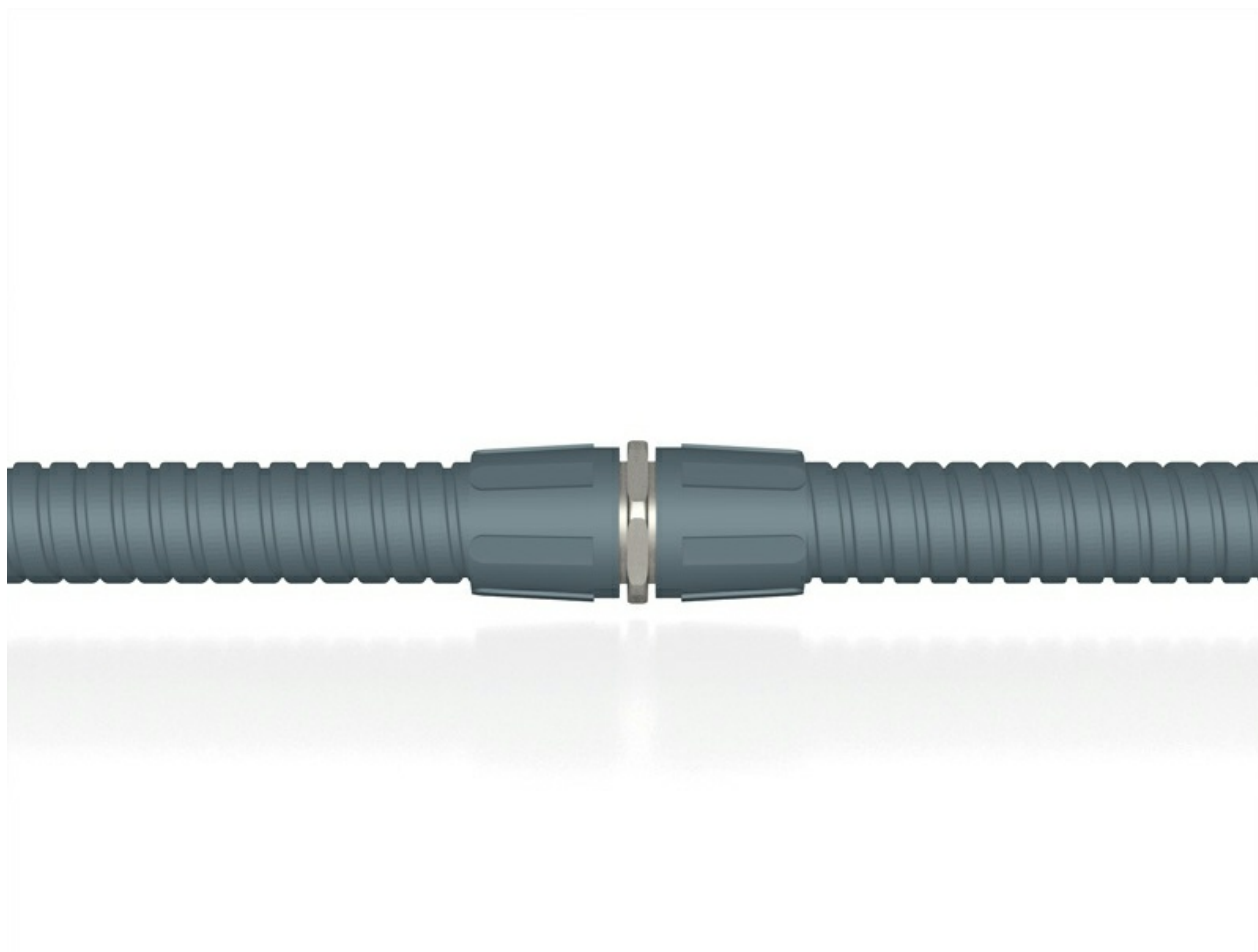

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



RGM Double Connector

4/4

