


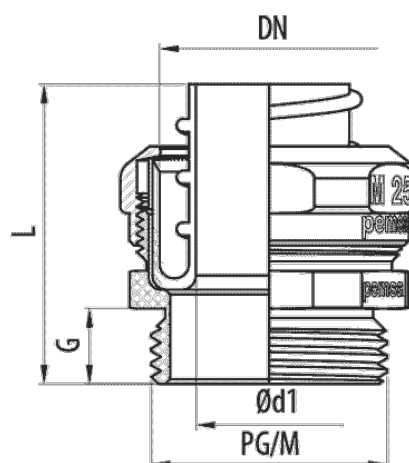

Description

Nickel-plated brass connector with external thread and polyethylene inner sleeve for assembly of TM, Ecoflex®, TM-PVC conduits. IP54 protection index. Available in different sizes of thread in metric and PG.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass with a polypropylene inner sleeve.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 90°C.

Applications

Suitable for the connection of TM, TM-PVC and Ecoflex® metallic flexible conduits, in the management of electrical cables for building, tertiary and industrial applications.

Solutions



Product data

ETIM 10	EC001180	Torque wrench	45
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,088
Protection System	LTN	u	20
Finish	Nickel-plated brass	Material	LATÓN NIQUELADO,POLIPROPILENO
DN	NW29	IP	IP54
M/PG	PG29	Working temperature range (°C)	-25 / 90 °C
G (mm)	9.5	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
Ø d1 (mm)	26.7		
L (mm)	36.3		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic