


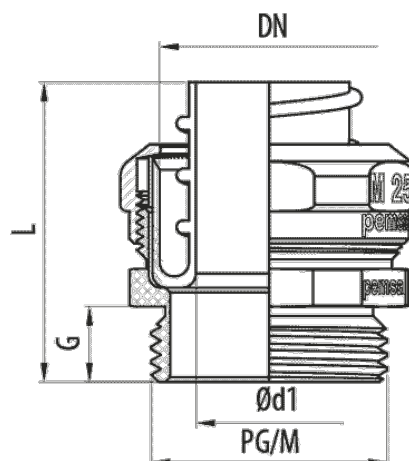

### Description

Nickel-plated brass connector with external thread and polyethylene inner sleeve for assembly of TM, Ecoflex®, TM-PVC conduits. IP54 protection index. Available in different sizes of thread in metric and PG.

### Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass with a polypropylene inner sleeve.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 90°C.

### Applications

Suitable for the connection of TM, TM-PVC and Ecoflex® metallic flexible conduits, in the management of electrical cables for building, tertiary and industrial applications.

### Solutions



| Product data                          |  |                                              |  |
|---------------------------------------|--|----------------------------------------------|--|
| ETIM 10                               |  | EC001180                                     |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  |                                              |  |
| Protection System                     |  | LTN                                          |  |
| Finish                                |  | Nickel-plated brass                          |  |
| DN                                    |  | NW48                                         |  |
| M/PG                                  |  | PG48                                         |  |
| G (mm)                                |  | 15                                           |  |
| Ø d1 (mm)                             |  | 45                                           |  |
| L (mm)                                |  | 54.8                                         |  |
| Torque wrench                         |  | 70                                           |  |
| kg/u                                  |  | 0,302                                        |  |
| u                                     |  | 5                                            |  |
| Material                              |  | LATÓN NIQUELADO,POLIPROPILENO                |  |
| IP                                    |  | IP54                                         |  |
| Working temperature range (°C)        |  | -25 / 90 °C                                  |  |
| Fire resistance                       |  | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |  |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |