


**Strut Clip** ( Ref: 67060050 )

1/6

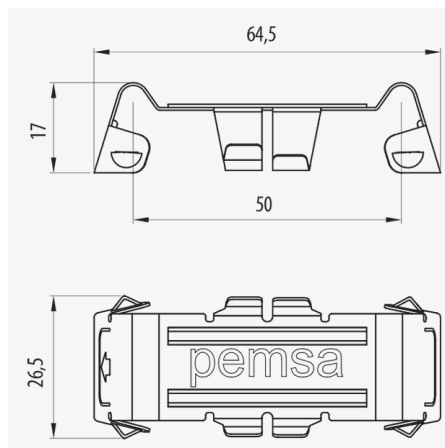

**Description**

Metal clip for connecting Rejiband® wire mesh tray tray to 41x21 or 41x41mm channel and strut. With INOX protection system, I316L finish. The clip fastening is compatible with all types of channel. It is suitable for all tray sizes except 35x60 and 60x60mm.

**Advantages**

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Fixing by quick mount click system.

No screws or other fasteners required.

**Applications**

Suitable for the fast fixing of Rejiband wire mesh tray onto 41x21 or 41x41mm channel in interior installations in a dry atmosphere without contaminants, outdoor, industrial, rural or Interior installations.

**Solutions**



OFFSHORE, PORTS TUNNELS INFRASTRUCTURES



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

|                                       |                           |                                |                            |
|---------------------------------------|---------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001005                  | u                              | 100                        |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |                           | Material                       | Acero inoxidable AISI 316L |
| Protection System                     | INOX                      | Working temperature range (°C) | -50 / 150 °C               |
| Finish                                | Stainless Steel AISI 316L | Fire resistance                | A1 No combustible          |
| Resistance Class                      | Class 9D                  |                                |                            |
| kg/u                                  | 0,010                     |                                |                            |

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



## Product applications

