
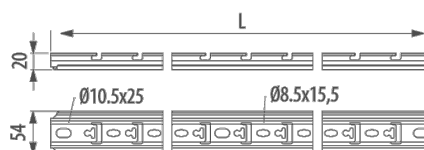


## SPLUS Omega Channel ( Ref: 67020112 )

1/4

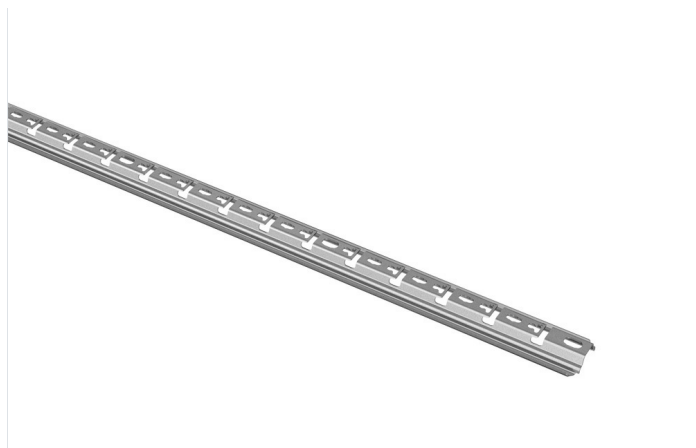

### Description

Channel with omega profile and universal connection system for Rejiband® and Pemsaband® trays. Length of 3 metres, With PG protection system. It allows you to configure different structures individually or with the help of omega SPLUS brackets to support wall or ceiling mounted tray with a threaded rod. Available in lengths of 1000, 2000 and 3000 mm. Made of steel in various Protection Systems.

### Advantages

Performance is increased by 20% when used as a suspension or as a wall mounted rail with other brackets attached.

CE conformity to directive 2014/35 / EU.

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Due to its dimensions and very versatile structure, it can be used in ceiling mounts as a suspension for several trays on the same line.

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

### Applications

Suitable for the creation of support structures for installations of Rejiband® and Pemsaband® trays in the management of electrical wiring and / or telecommunications in the tertiary sector.

### Solutions



OFFSHORE, PORTS RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL TUNNELS INFRASTRUCTURES FIRE RESISTANCE SOLUTION



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                              |                    |                                       |                            |
|----------------------------------------------|--------------------|---------------------------------------|----------------------------|
| <b>ETIM 10</b>                               | EC000386           | <b>u</b>                              | 1                          |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> | 9,981              | <b>Material</b>                       | Steel with surface coating |
| <b>Protection System</b>                     | PG                 | <b>Working temperature range (°C)</b> | -50 / 150 °C               |
| <b>Finish</b>                                | PG3, Pregalvanised | <b>Fire resistance</b>                | A1 No combustible          |
| <b>Resistance Class</b>                      | Class 3            |                                       |                            |
| <b>Length (m)</b>                            | 3                  |                                       |                            |
| <b>kg/u</b>                                  | 3,090              |                                       |                            |

## 🔒 Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## 🏠 Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



## Product applications

