
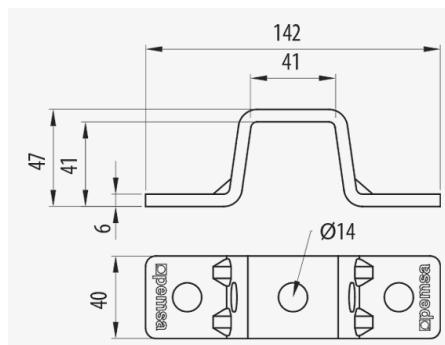


Clamp 41x41 n°12 (Ref: 67030207)

1/3

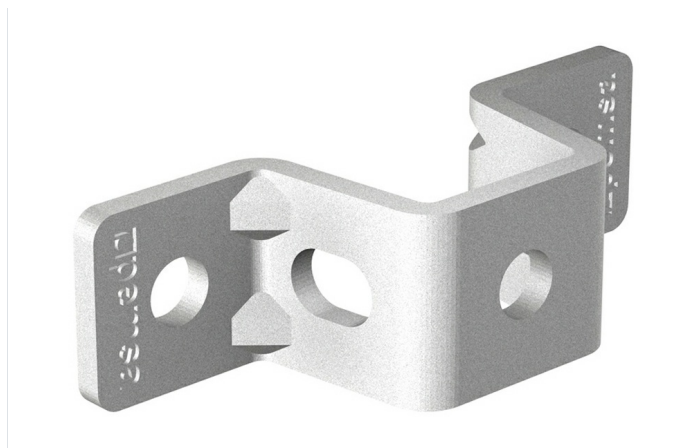

Description

U-shaped metal junction piece number 12 for rail mounting 41x41 mm in a crossover perpendicular crossing for support structures in the installation of trays. Of 41 mm height. Made of steel and GC Protection System.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

Provides rigidity in the channel joints.

CE conformity to directive 2014/35 / EU.

Connect with 3 hexagonal bolts and M10 channel nuts.

Available for 41x41 channels.

Applications

Suitable for connection with 41x41 mm channels for the creation of support structures for tray installations in the conduction of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and tertiary sector.

Solutions



OFFSHORE, PORTS TUNNELS INFRASTRUCTURES



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC011522	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	1
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 6	Fire resistance	A1 No combustible
Flange (mm)	41		
Angle	90		

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🧊 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

