
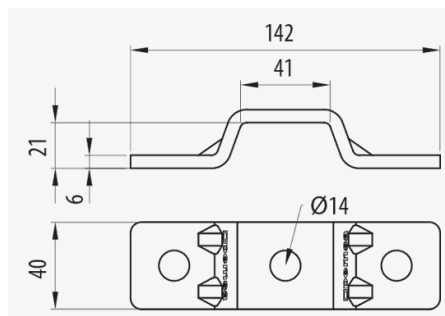


Clamp 41x21 n°14 (Ref: 81000500)

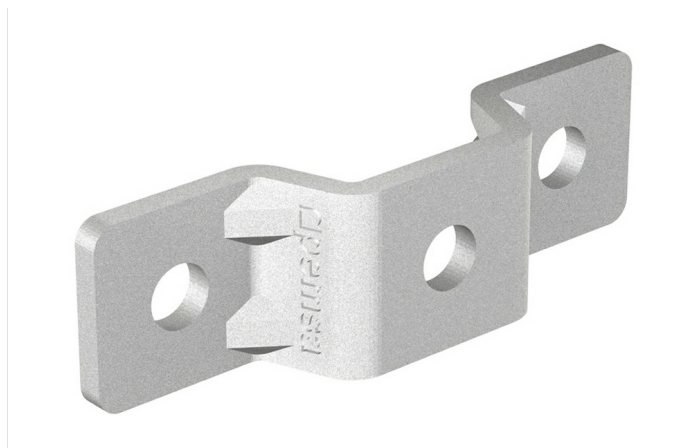

Description

U-shaped metal clamp N° 14 for channel assembly of 41x21 mm in a crossover perpendicular crossing for support structures in the installation of trays. Made of steel and GC Protection System.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

CE conformity to directive 2014/35 / EU.

Connect with 3 hexagonal bolts and M10 channel nuts.

Available for 41x21 channels.

Allows the perpendicular connection of two sections of channel.

Applications

Suitable for connection with channels 41x ||| [ALA_ALTO] ||| 'mm for the creation of support structures for tray installations in the conduction of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

Solutions



Clamp 41x21 n°14 (Ref: 81000500)

Product data			
ETIM 10	EC011522	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System	INOX		
kg/u	0,289		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic



Clamp 41x21 n°14 (Ref: 81000500)

Product applications

