


Megaband REP Central Reducer

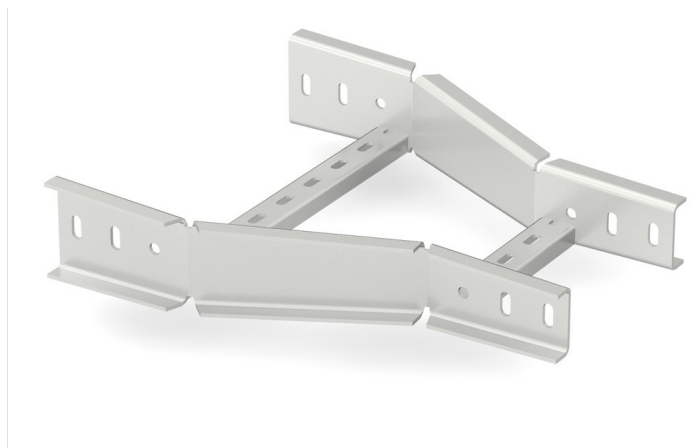

Description

Metal accessory for creating an equal reduction between two sections of Megaband® REP ladder. It allows changes in width and height of different sections to be made very easily using a single piece. Made from steel with GC Protection system

Advantages

It allows the creation of width changes to adapt to the demands of each electrical installation.

Available in 70, 100 and 120 height and 100 to 600 mm wide

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating width and height reductions in Megaband® REP ladder, in electrical and telecommunications installations and to support large loads in industrial, petrochemical, oil & gas, power plant, mining and cement facilities.

Solutions



Main technical characteristics									
 GC	 Class 8	 70, 100, 120	 200, 400, 600	 300	 1	 Steel with surface coating	 20 J		
 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001011							

Product data				
			Ref	kg/u
70	200	100	82002425	3,890
100	400	200	82002426	4,970
120	600	400	82002427	6,480

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic