


Reducer Pemsaband Vulcan (Ref: 82005007)

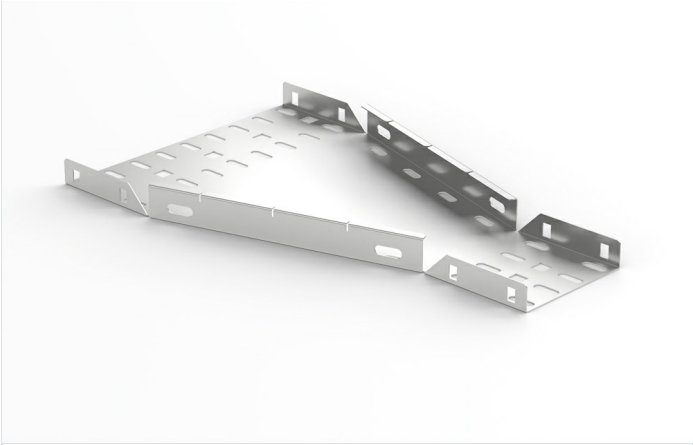

Description

Advantages

Applications

Solutions



Reducer Pemsaband Vulcan (Ref: 82005007)

2/2

Product data

ETIM 10		Material	Steel with surface coating
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Impact Strength (J)	20 J
Protection System	PG	IP	IP44
Finish	PG3, Pregalvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 3	Fire resistance	A1 No combustible
Flange (mm)	25		
Width (mm)	450		
Reduce to:	150		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

