


Reducer Pemsaband Vulcan (Ref: 82005013)

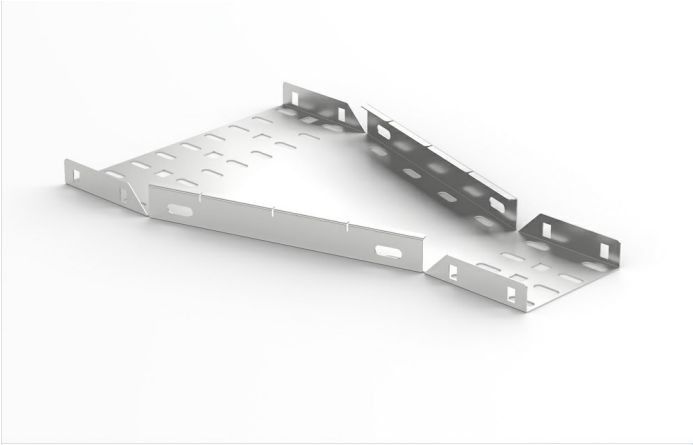

Description

Advantages

Applications

Solutions



Product data			
ETIM 10		Material	
		Steel with surface coating	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Impact Strength (J)	
		20 J	
Protection System		IP	
PG		IP44	
Finish		Working temperature range (°C)	
PG3, Pregalvanised		-50 / 150 °C	
Resistance Class		Fire resistance	
Class 3		A1 No combustible	
Flange (mm)			
25			
Width (mm)			
900			
Reduce to:		750	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass
Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

