


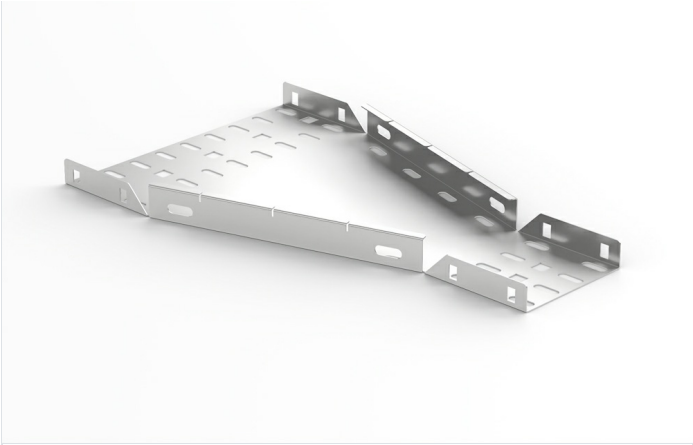

|              |
|--------------|
| Description  |
| Advantages   |
| Applications |
| Solutions    |

| Product data                          |  |                                |  |
|---------------------------------------|--|--------------------------------|--|
| ETIM 10                               |  | Material                       |  |
|                                       |  | Steel with surface coating     |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | Impact Strength (J)            |  |
|                                       |  | 20 J                           |  |
| Protection System                     |  | IP                             |  |
| PG                                    |  | IP44                           |  |
| Finish                                |  | Working temperature range (°C) |  |
| PG3, Pregalvanised                    |  | -50 / 150 °C                   |  |
| Resistance Class                      |  | Fire resistance                |  |
| Class 3                               |  | A1 No combustible              |  |
| Flange (mm)                           |  |                                |  |
| 50                                    |  |                                |  |
| Width (mm)                            |  |                                |  |
| 300                                   |  |                                |  |
| Reduce to:                            |  | 150                            |  |

Protection System

CU

Copper electroplated

PG

Pregalvanised

EZ

Electrogalvanised

BC

Electrogalvanised Bichromate

BK8

High Resistance Coating

GC

Hot Dip Galvanising

INOX

Stainless Steel

PT

Polyester Paint

AL

Aluminum

LN

Brass or Nickel-plated brass

Insulating materials

PC+ABS

Halogen Free Polycarbonate + ABS

PVC

Polyvinyl Chloride

PP

Halogen Free Polypropylene

PA6

Halogen Free Polyamide 6

PA12

Halogen Free Polyamide 12

PU

Polyurethane

PE

Polyethylene

NBR

NBR rubber

PET

Thermoplastic Polyester

TPV

Thermoplastic