


Reducer Pemsaband Vulcan (Ref: 82005048)

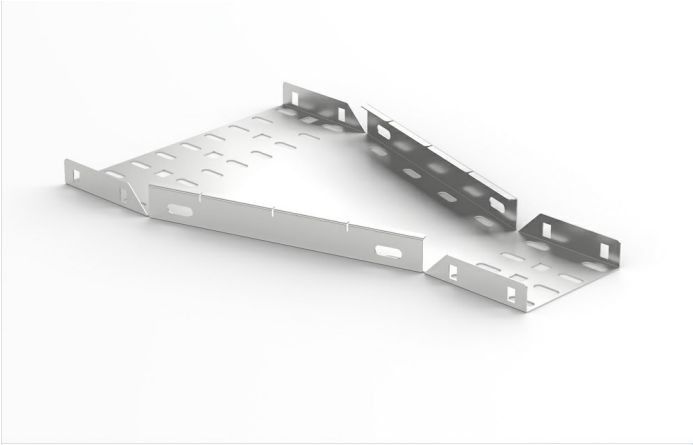

Description

Advantages

Applications

Solutions



Reducer Pemsaband Vulcan (Ref: 82005048)

Product data			
ETIM 10		Material	
		Steel with surface coating	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Impact Strength (J)	
		20 J	
Protection System		IP	
AZ+		IP44	
Finish		Working temperature range (°C)	
ZM High Resistance Alloy		-50 / 150 °C	
Resistance Class		Fire resistance	
Class 8		A1 No combustible	
Flange (mm)			
50			
Width (mm)			
300			
Reduce to:		150	

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

