


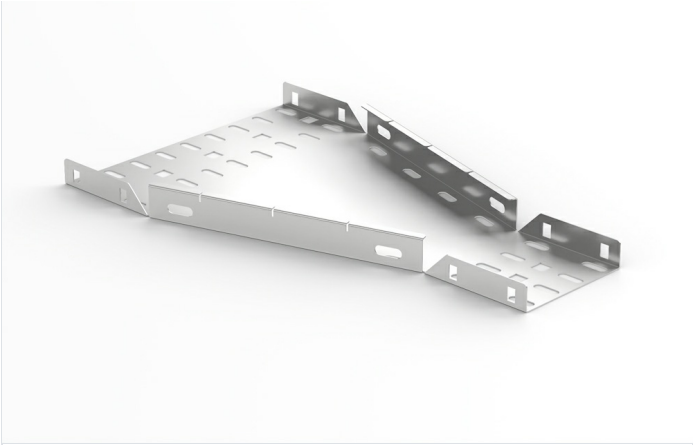

Description
Advantages
Applications
Solutions

Product data			
ETIM 10		Material	
		Steel with surface coating	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Impact Strength (J)	
		20 J	
Protection System		IP	
AZ+		IP44	
Finish		Working temperature range (°C)	
ZM High Resistance Alloy		-50 / 150 °C	
Resistance Class		Fire resistance	
Class 8		A1 No combustible	
Flange (mm)			
50			
Width (mm)			
450			
Reduce to:		150	

Protection System

CU

- Copper electroplated

PG

- Pregalvanised

EZ

- Electrogalvanised

BC

- Electrogalvanised Bichromate

BK8

- High Resistance Coating

GC

- Hot Dip Galvanising

INOX

- Stainless Steel

PT

- Polyester Paint

AL

- Aluminum

LN

- Brass or Nickel-plated brass

Insulating materials

PC+ABS

- Halogen Free Polycarbonate + ABS

PVC

- Polyvinyl Chloride

PP

- Halogen Free Polypropylene

PA6

- Halogen Free Polyamide 6

PA12

- Halogen Free Polyamide 12

PU

- Polyurethane

PE

- Polyethylene

NBR

- NBR rubber

PET

- Thermoplastic Polyester

TPV

- Thermoplastic