


Reducer Pemsaband Vulcan (Ref: 82005054)

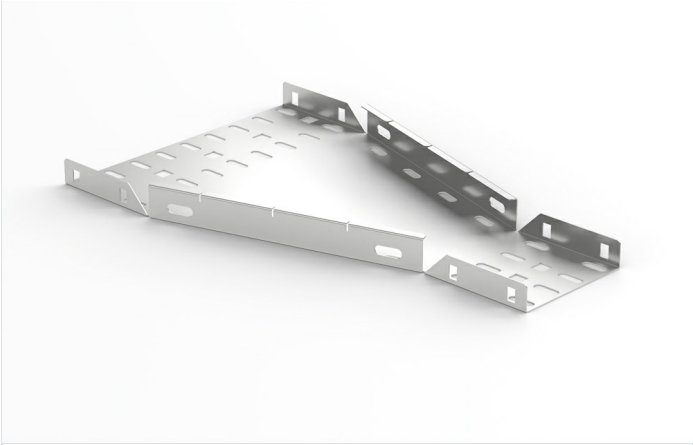

Description

Advantages

Applications

Solutions



Reducer Pemsaband Vulcan (Ref: 82005054)

Product data			
ETIM 10		Material	
		Steel with surface coating	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Impact Strength (J)	
		20 J	
Protection System		IP	
AZ+		IP44	
Finish		Working temperature range (°C)	
ZM High Resistance Alloy		-50 / 150 °C	
Resistance Class		Fire resistance	
Class 8		A1 No combustible	
Flange (mm)			
50			
Width (mm)			
750			
Reduce to:		600	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

