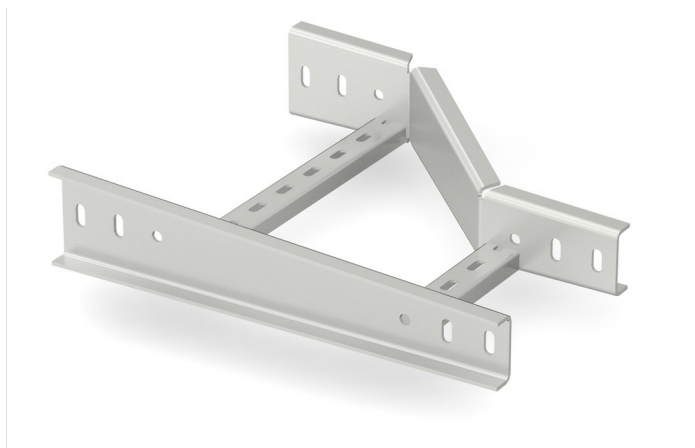


Megaband REP Right Reducer

1/2

**Description**

Metal accessory for creating a right offset reduction in the wiring installation with the Megaband® REP ladder. It allows changes in width and height of different sections to be made very easily using a single piece. Made from steel with GC Protection system

Advantages

It allows the creation of width changes to adapt to the demands of each electrical installation.

Available in 70, 100 and 120 height and 100 to 600 mm wide

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating width and height reductions in Megaband® REP ladder, in electrical and telecommunications installations and to support large loads in industrial, petrochemical, oil & gas, power plant, mining and cement facilities.

Solutions

www.pemsa-rejiband.com

Any information included in this document is property of Pemsaband®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsaband®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsaband, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsaband Cable Management, S.A."

Megaband REP Right Reducer

Main technical characteristics

GC	Class 8	70, 100, 120	200, 400, 600	300	1	Steel with surface coating	20 J
-50 / 150 °C	A1 No combustible	ETIM 10 EC001011					

Product data

			Ref	kg/u
70	200	100	82002407	3,940
100	400	200	82002420	5,160
120	600	400	82002421	6,700

Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

