


Left Reducer Pemsaband Vulcan (Ref: 82005192)

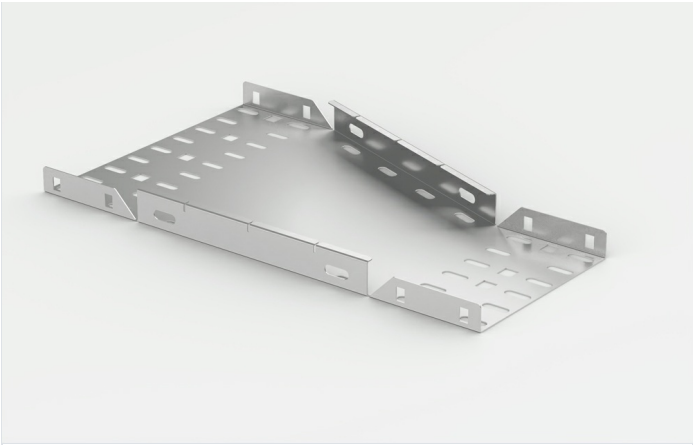

Description

Advantages

Applications

Solutions



Product data			
ETIM 10		Material	
		Steel with surface coating	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Impact Strength (J)	
		20 J	
Protection System		IP	
AZ+		IP44	
Finish		Working temperature range (°C)	
ZM High Resistance Alloy		-50 / 150 °C	
Resistance Class		Fire resistance	
Class 8		A1 No combustible	
Flange (mm)			
25			
Width (mm)			
900			
Reduce to:		750	

 **Protection System**

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

 **Insulating materials**

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic