
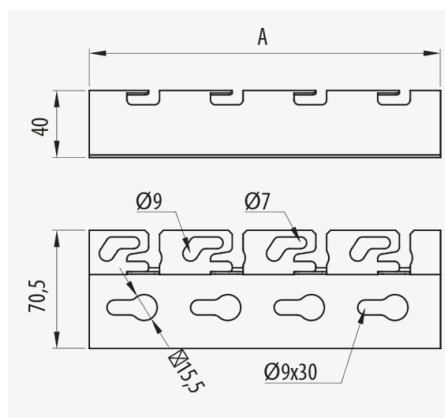


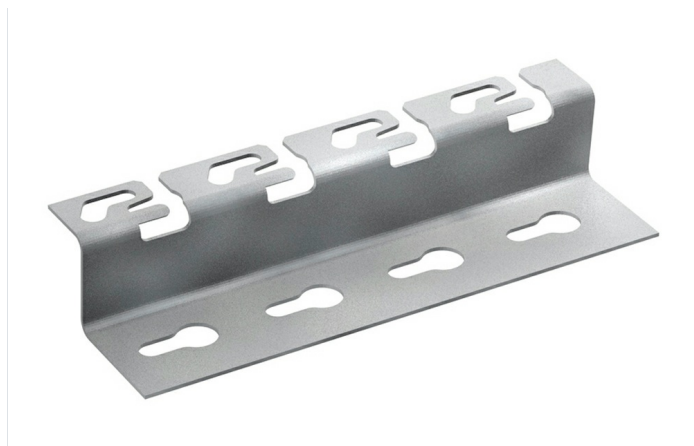

### Description

Metal support that allows the installation of Rejiband® and Pemsaband® trays to the floor or wall. Of 40 mm height, Width 100 mm, With GC protection system, HDG finish. The Click system, for quick connection of wire mesh trays, allows for installation at a height of 40 mm without the need of any fixings. Available in different sizes and Protection Systems.

### Advantages

Facilitates handling and vertical installation of Rejiband wire mesh tray by positioning it in the click pin system.

Allows the installation of the tray at a distance of 40 mm from the wall or floor.

Universal mounting system compatible with wire mesh trays by means of the Quick mount Click system without the need of screws or with sheet metal trays by using screws and the configuration of L-shaped M6/M8 holes.

### Applications

It is suitable for the installation of Rejiband® and Pemsaband trays and can be mounted vertically on a wall and is an efficient and simple solution as well in false floor installations.

### Solutions



RENEWABLE ENERGIES



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                              |                         |                                       |                            |
|----------------------------------------------|-------------------------|---------------------------------------|----------------------------|
| <b>ETIM 10</b>                               | EC000022                | <b>u</b>                              | 10                         |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> | 0,306                   | <b>Material</b>                       | Steel with surface coating |
| <b>Protection System</b>                     | GC                      | <b>SWL (kg)</b>                       | 250                        |
| <b>Finish</b>                                | HDG, Hot Dip Galvanised | <b>Working temperature range (°C)</b> | -50 / 150 °C               |
| <b>Resistance Class</b>                      | Class 6                 | <b>Fire resistance</b>                | A1 No combustible          |
| <b>Flange (mm)</b>                           | 40                      |                                       |                            |
| <b>Width (mm)</b>                            | 100                     |                                       |                            |
| <b>kg/u</b>                                  | 0,118                   |                                       |                            |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



## Product applications

