
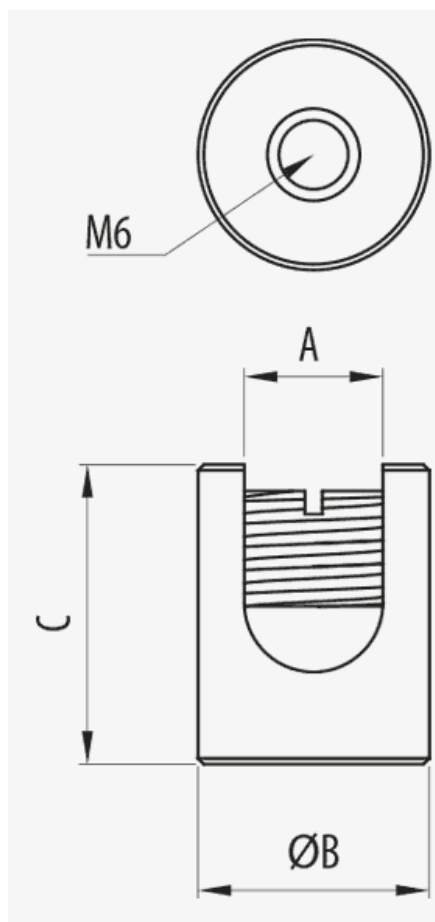


Bonding Connector

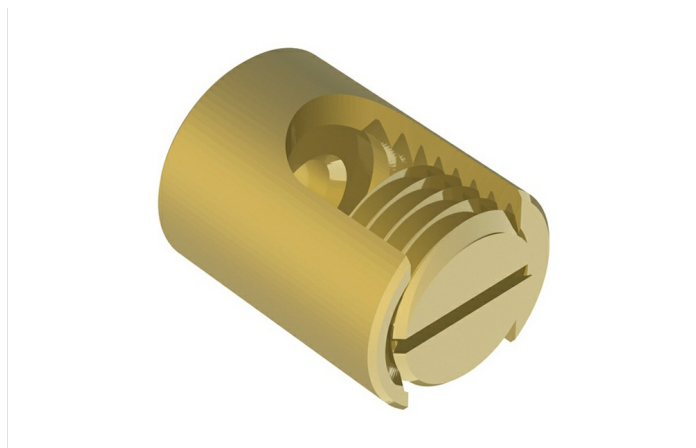

Description

Brass terminal for the equipotential bonding of the Pemsaband® tray and Megaband® ladder or for their connection to the protective conductor and earthing of the electrical installation.

Advantages

Ensures the equipotentiality of the continuous sections of Pemsaband®.

It facilitates the earthing of the Pemsaband® tray.

Economical and reliable design.

Select the reference according to the size of the conductor.

Terminal can also be used with Rejiband® trays.

Applications

It is used for the equipotential connection of the Pemsaband® tray and Megaband® ladder or for their connection to the protective conductor and earthing of the electrical installation.

Solutions



Main technical characteristics

 LTN

 20

 Brass

 -50 / 150 °C

ETIM 10
EC002935

Product data

		A _(mm)	B _(mm)	Ref	kg/u
16	4.5 / 8	16	50	68000034	0,024
50	8 / 11.5	50	110	68000035	0,043

 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene


NBR - NBR rubber

PET - Thermoplastic Polyester


TPV - Thermoplastic

Bonding Connector


Product applications

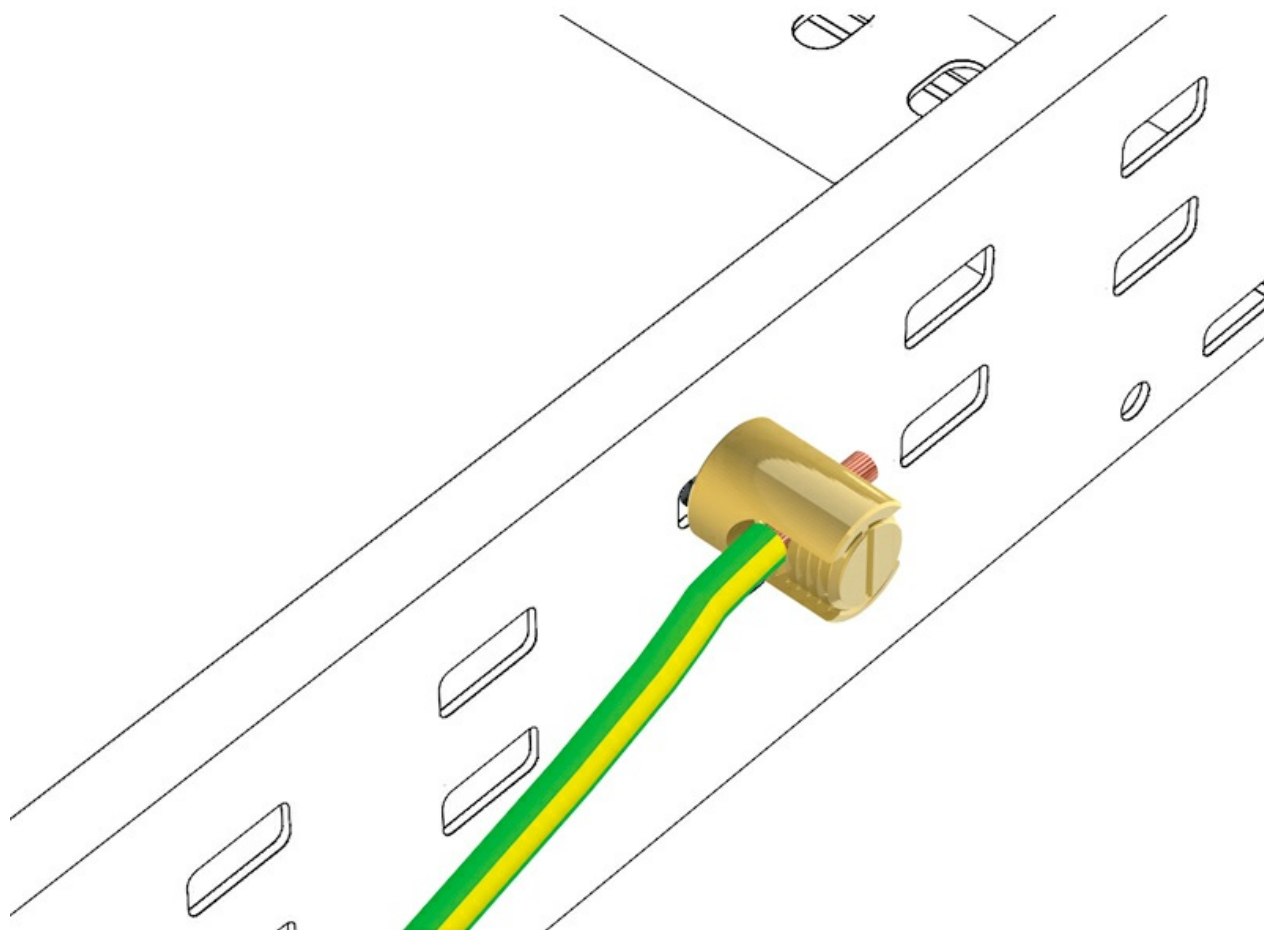

Bonding Connector

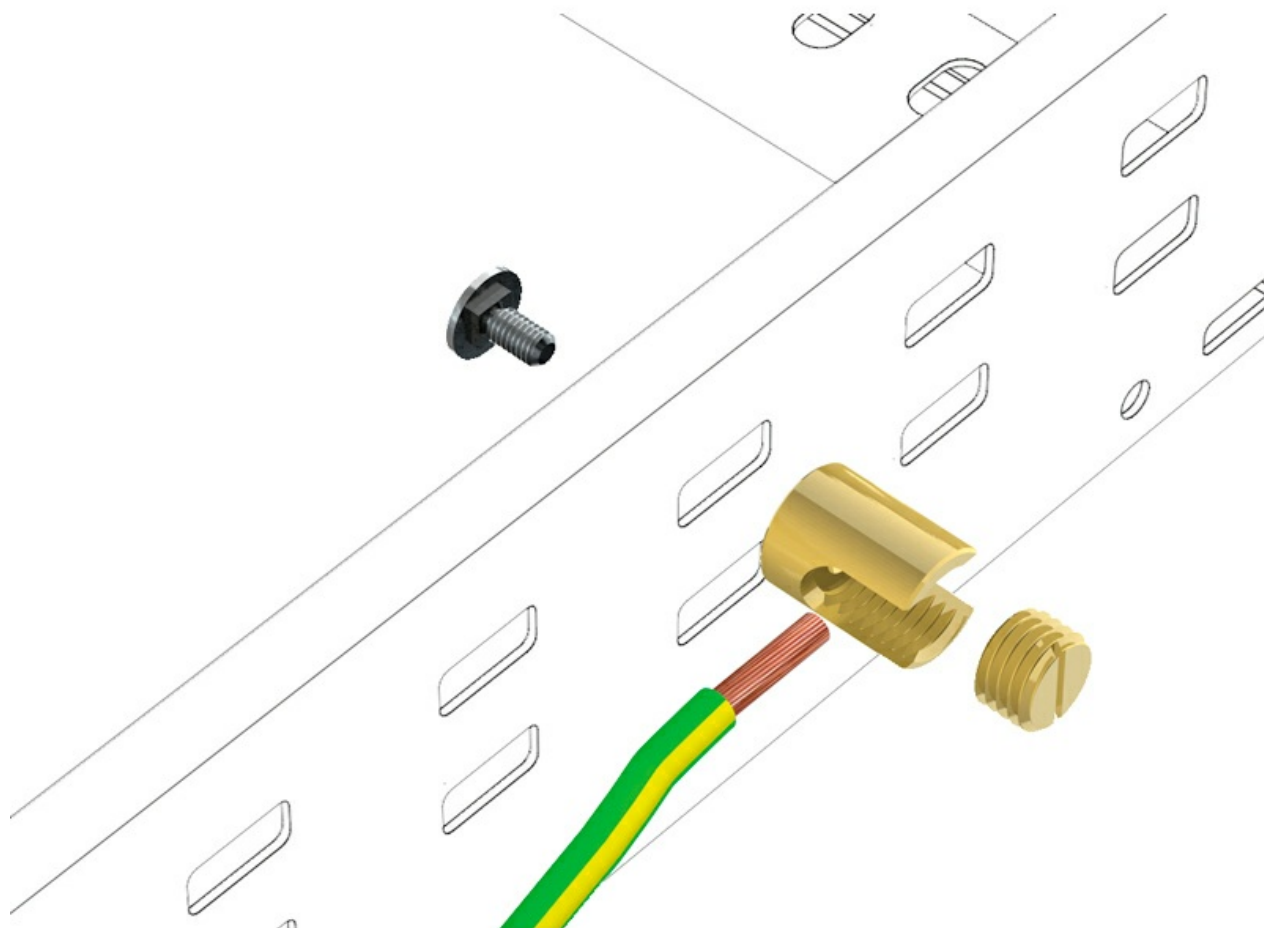

Bonding Connector

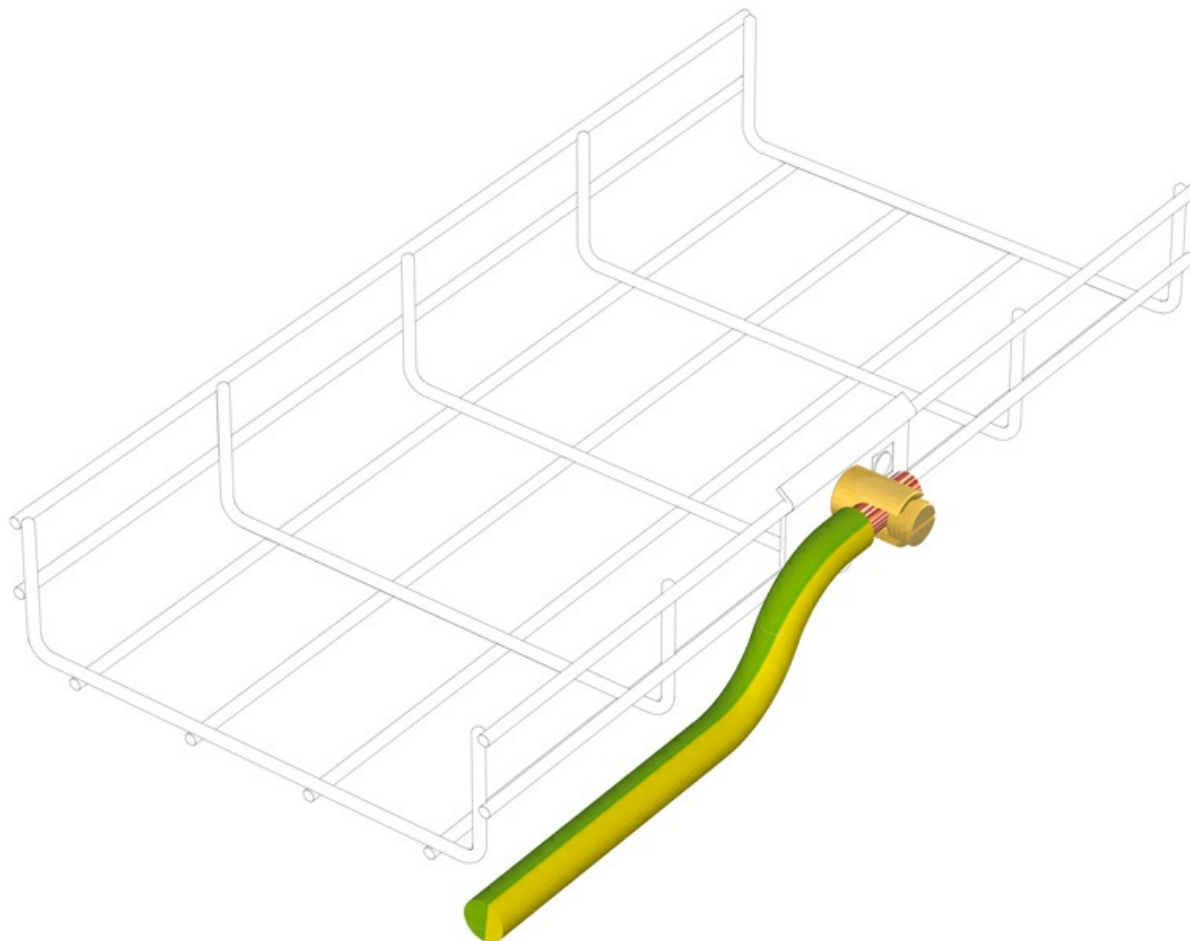

Bonding Connector

