
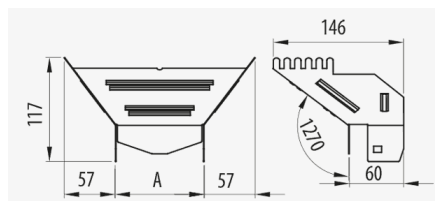


Base Entry Rejiband Pemsaband

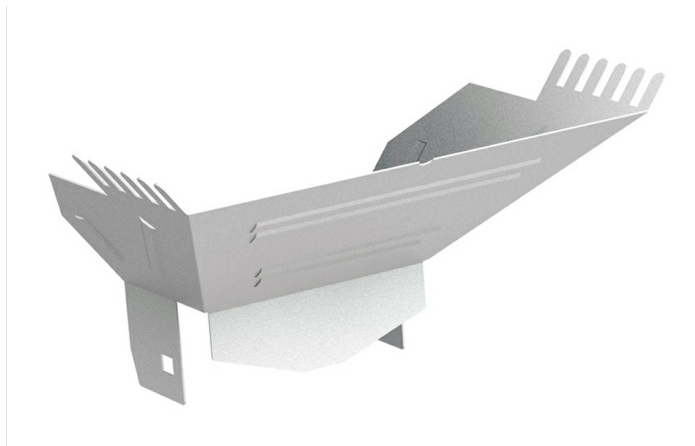

Description

Metal accessory to create a vertical branch from a Rejiband® tray to a Pemsaband tray. Available in two sizes and two Protection Systems.

Advantages

Quick-connect click-fit system with no screws required to connect to the Rejiband® tray.

Complete view of the whole installation.

Prevents damage to the cables when making the joint.

Electrical continuity guaranteed according to standard IEC61537.

Applications

Suitable for the vertical drop from Rejiband® tray to Pemsaband® sheet trays for the protection of cables in Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Main technical characteristics

 100, 150	 1	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC002397
---	---	--	--	---	---------------------

Product data

			Ref	kg/u
PG	Class 3	100	70027100	0,228
PG	Class 3	150	70027150	0,309
GC	Class 5	100	70037100	0,245
GC	Class 5	150	70037150	0,332

 Protection System


- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Base Entry Rejiband Pemsaband

Product applications

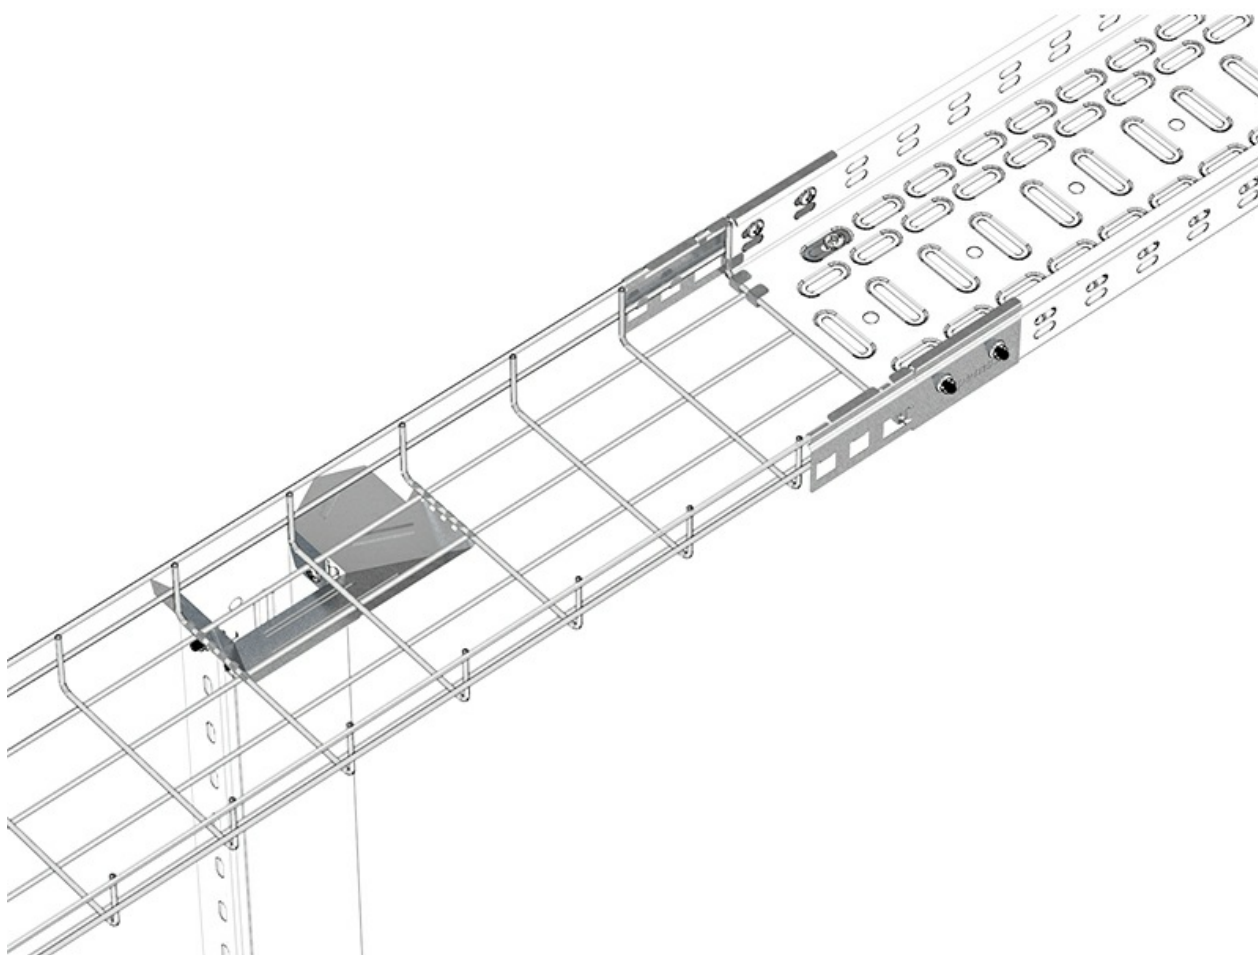

Base Entry Rejiband Pemsaband



Base Entry Rejiband Pemsaband

