


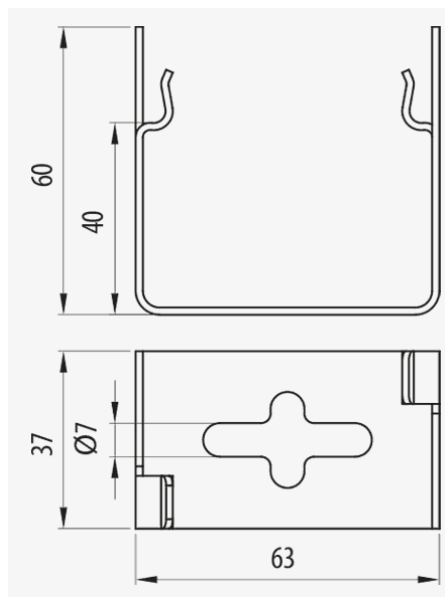

Description

Support in steel used for the ceiling installation of Rejiband® wire mesh tray with a height of 35 and 60 mm and widths of 60, 100 and 150 mm. With EZ protection system, EZ3 finish. Quick assembly thanks to the Click system of connection without the need of screws. Permissible working load up to 10 kg. Available in various Protection Systems.

Advantages

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

It allows the introduction of cables into the tray from the side.

For wall installation, use the side holes to secure with a M6 or M8 screw or bolt.

For ceiling installation, use M6 or M8 threaded rod connected through the centre of the bracket.

Fast mount system without the need for screws. Folding the fixing clips secures the tray.

Applications

Suitable for wall and ceiling mounting of the Rejiband® 35x60 and 60x60 mm wire mesh tray.

Solutions



Product data

ETIM 10	EC001003	u	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Steel with surface coating
Protection System	EZ	Working temperature range (°C)	-50 / 150 °C
Finish	EZ3, Electrogalvanised	Fire resistance	A1 No combustible
Resistance Class	Class 3		
kg/u	0,067		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

