


## Light Duty Ceiling Support ( Ref: 62036020 )

1/10

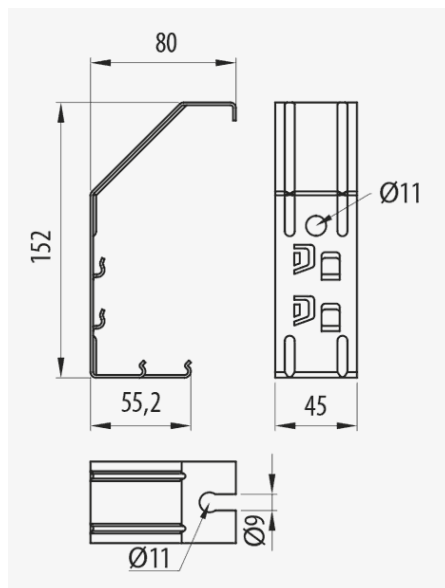

### Description

Support in steel used for the ceiling installation of Rejiband® wire mesh tray with a height of 35 and 60 mm and widths of 60, 100 and 150 mm. With GC protection system. Quick assembly thanks to the Click system of connection without the need of screws. Permissible working load up to 10 kg. Available in various Protection Systems.

### Advantages

Designed for light loads and trays of small sizes (widths 60, 100 & 150 mm).

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

It allows the introduction of cables into the tray from the side.

Fixing by quick mount click system.

No screws or other fasteners required.

### Applications

Suitable for supporting light loads to the ceiling in cable routing in small size Rejiband® trays for electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Light Duty Ceiling Support ( Ref: 62036020 )

2/10

## Product data

|                                       |             |                                |                            |
|---------------------------------------|-------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001003    | Material                       | Steel with surface coating |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |             | SWL (kg)                       | 10                         |
| Protection System                     | GC          | Working temperature range (°C) | -50 / 150 °C               |
| Finish                                | Zinc Nickel | Fire resistance                | A1 No combustible          |
| Resistance Class                      | Class 8     |                                |                            |
| kg/u                                  | 0,136       |                                |                            |
| u                                     | 10          |                                |                            |

## Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

## Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




**Light Duty Ceiling Support** ( Ref: 62036020 )

3/10

Product applications

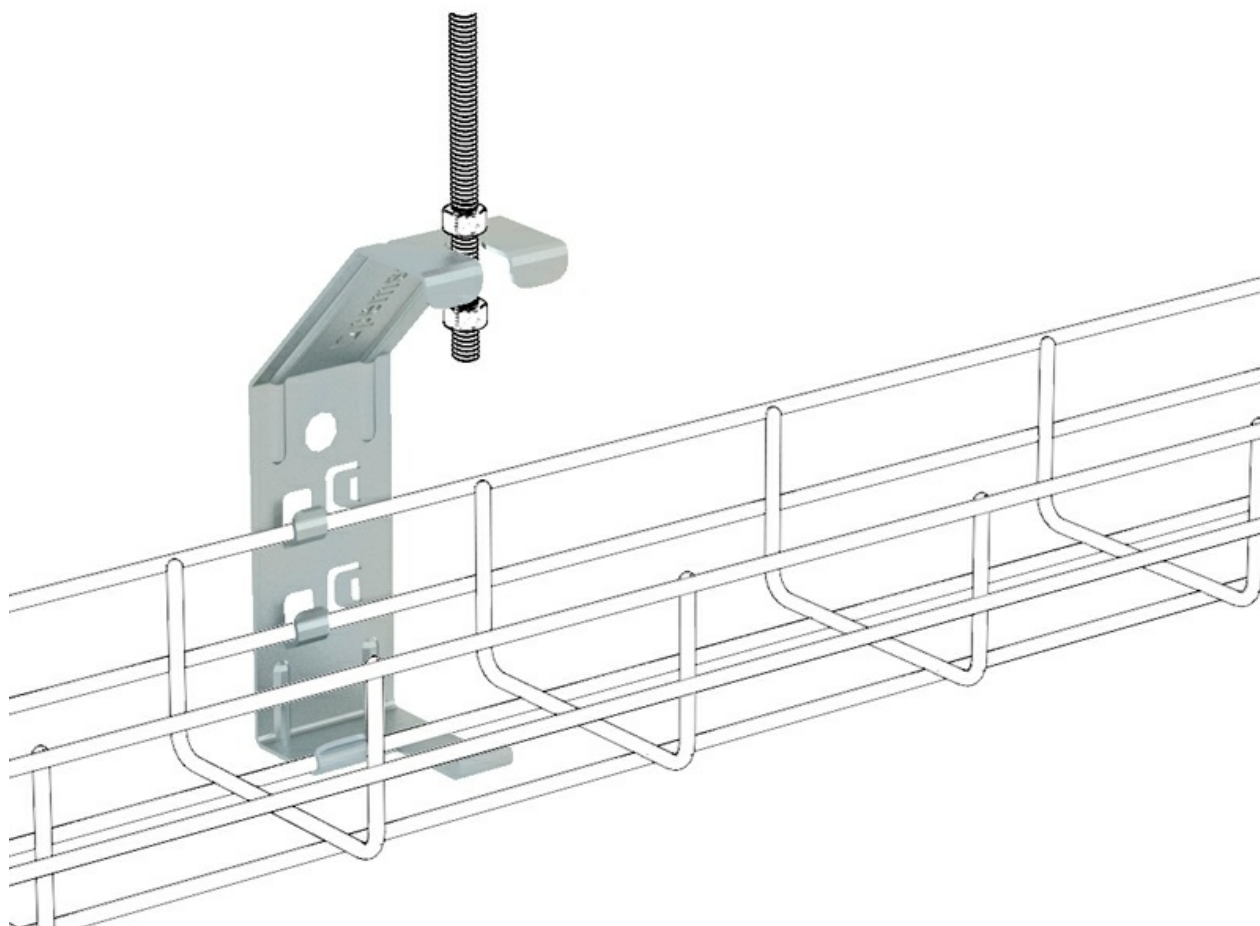


**Light Duty Ceiling Support** ( Ref: 62036020 )

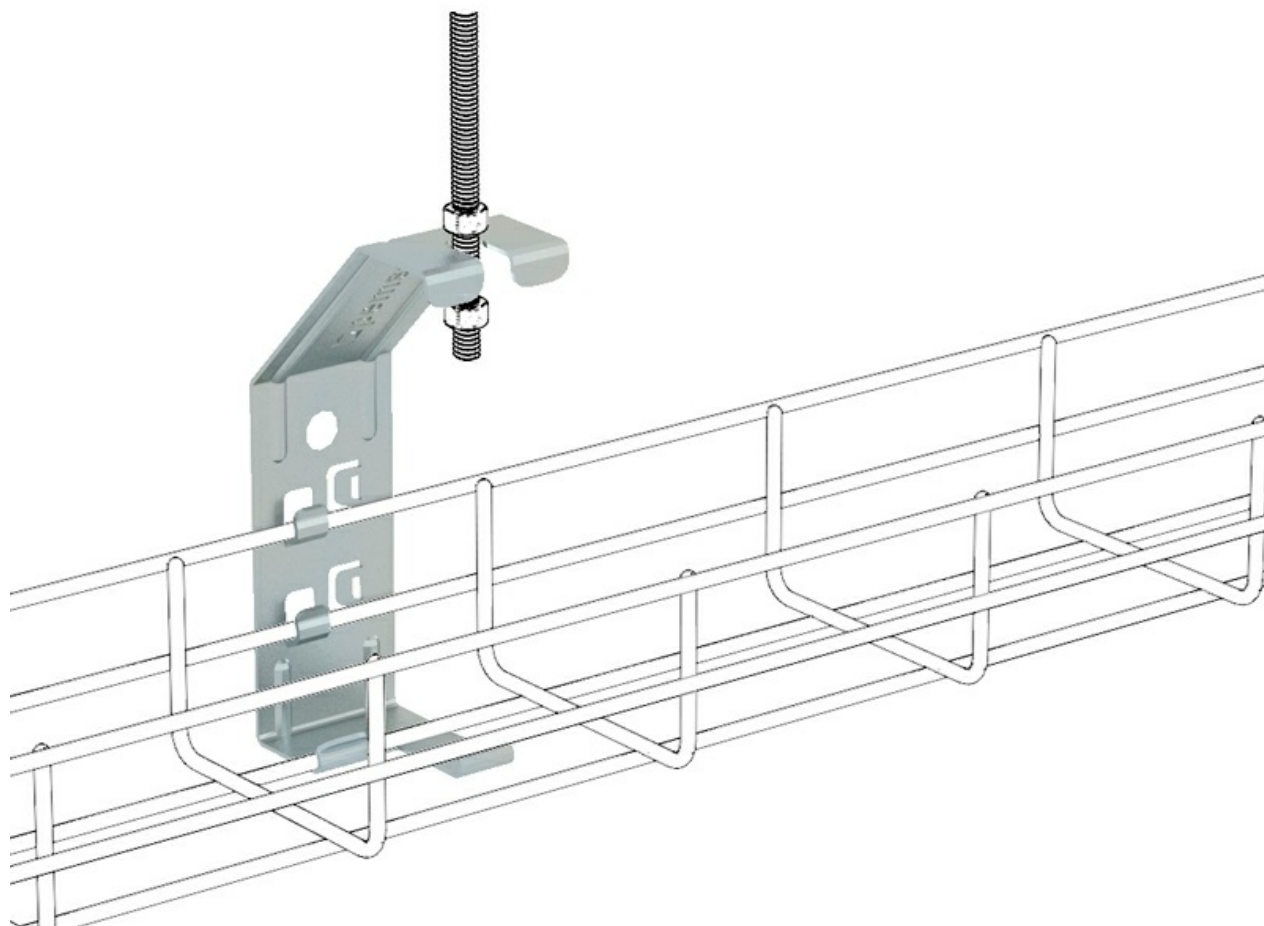


**Light Duty Ceiling Support** ( Ref: 62036020 )

5/10

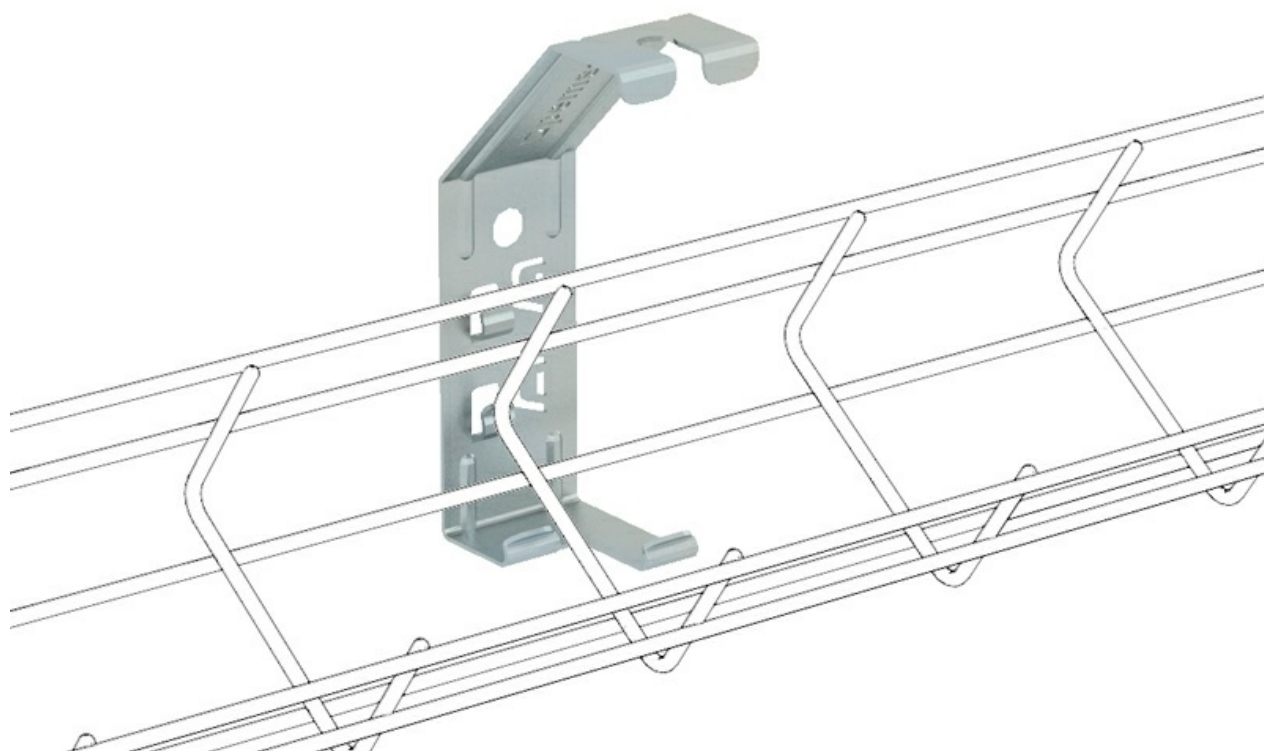


**Light Duty Ceiling Support** ( Ref: 62036020 )

6/10

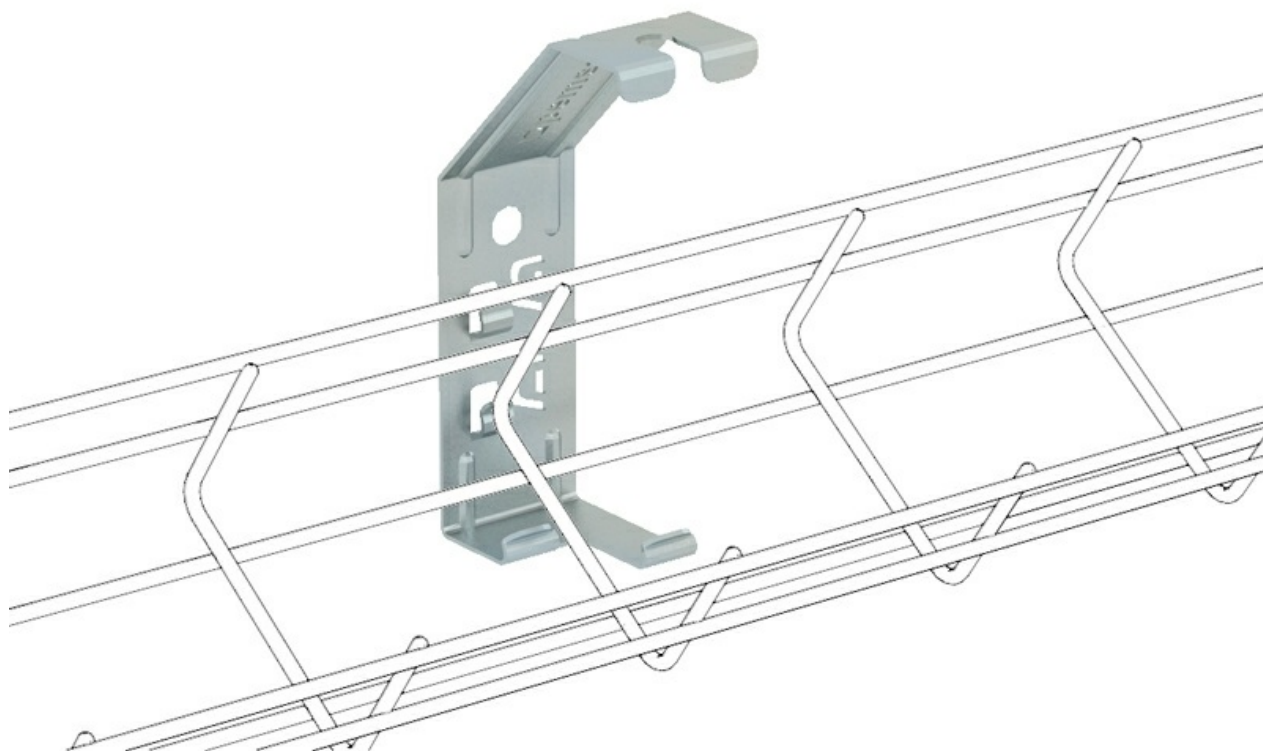


**Light Duty Ceiling Support** ( Ref: 62036020 )

7/10

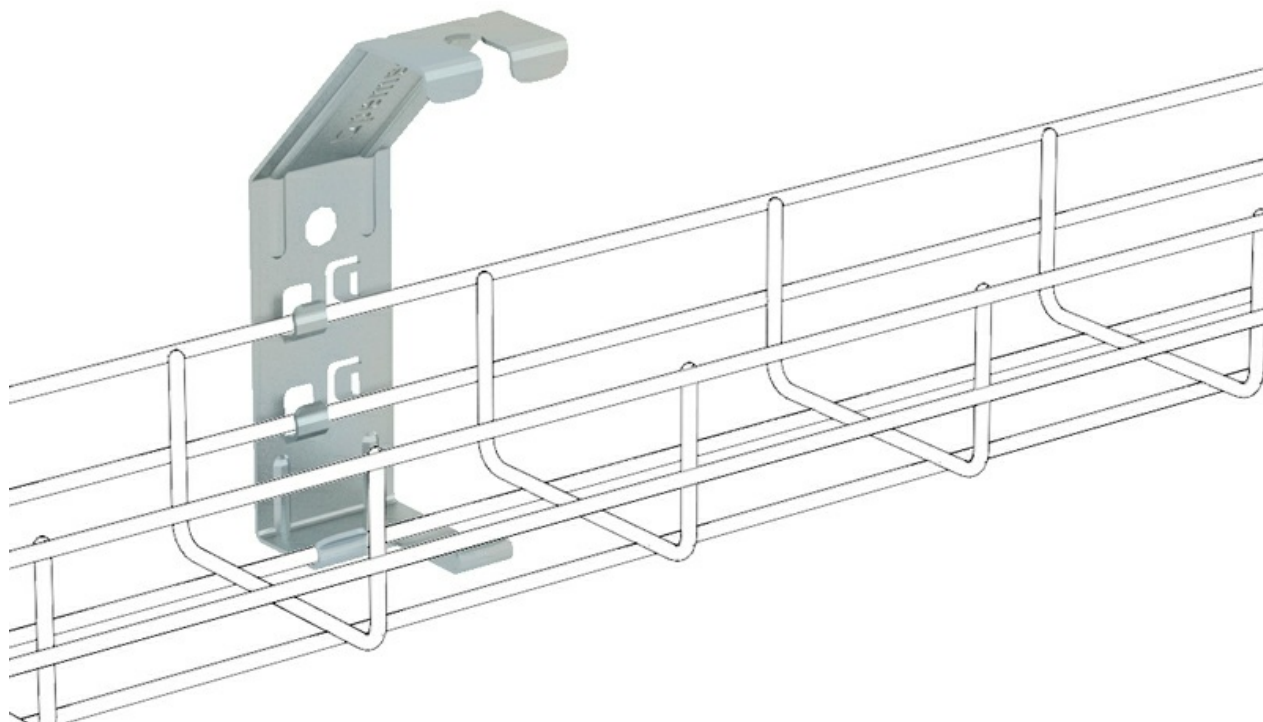


**Light Duty Ceiling Support** ( Ref: 62036020 )

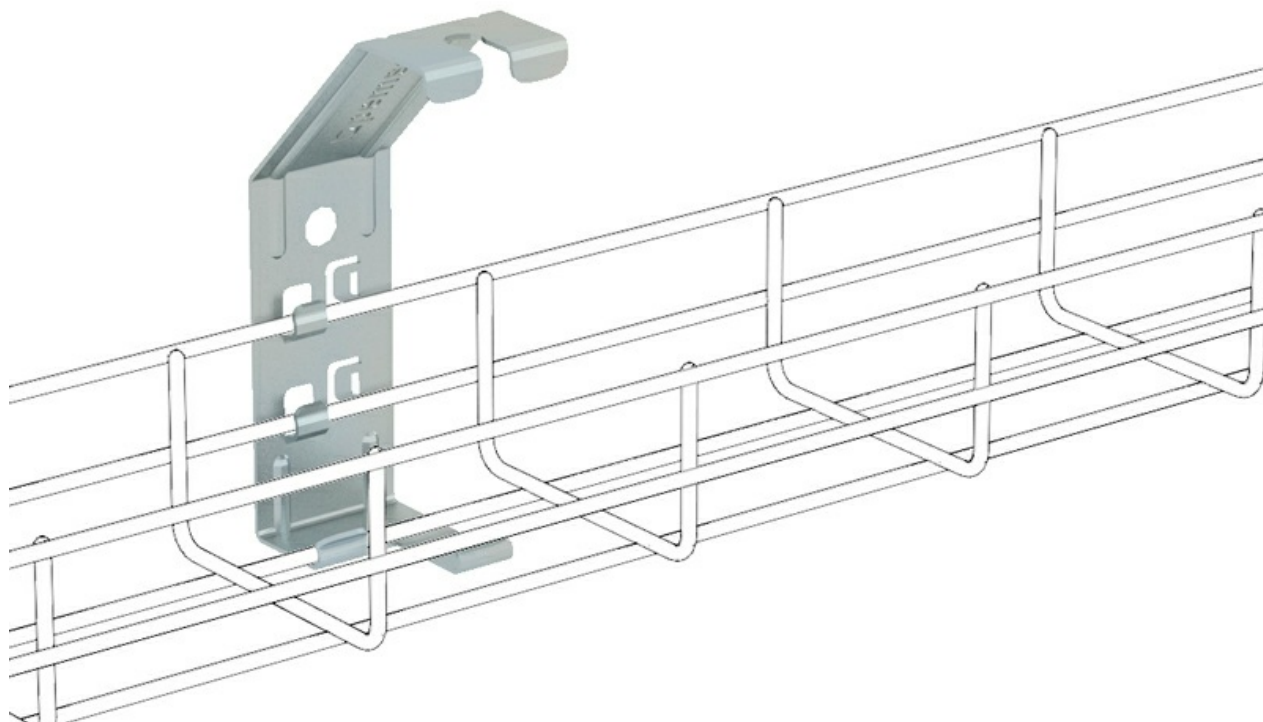

**Light Duty Ceiling Support** ( Ref: 62036020 )

9/10

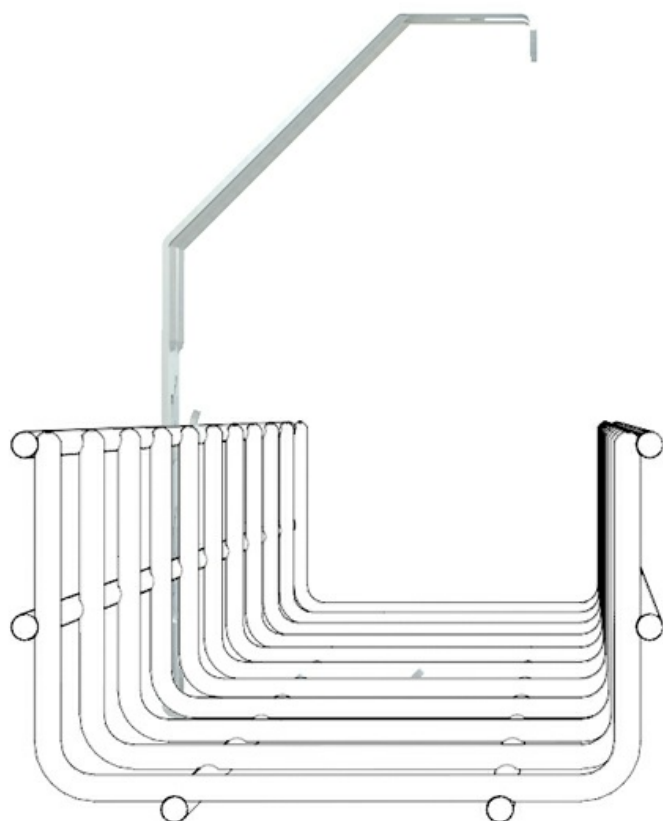


[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



**Light Duty Ceiling Support** ( Ref: 62036020 )

10/10

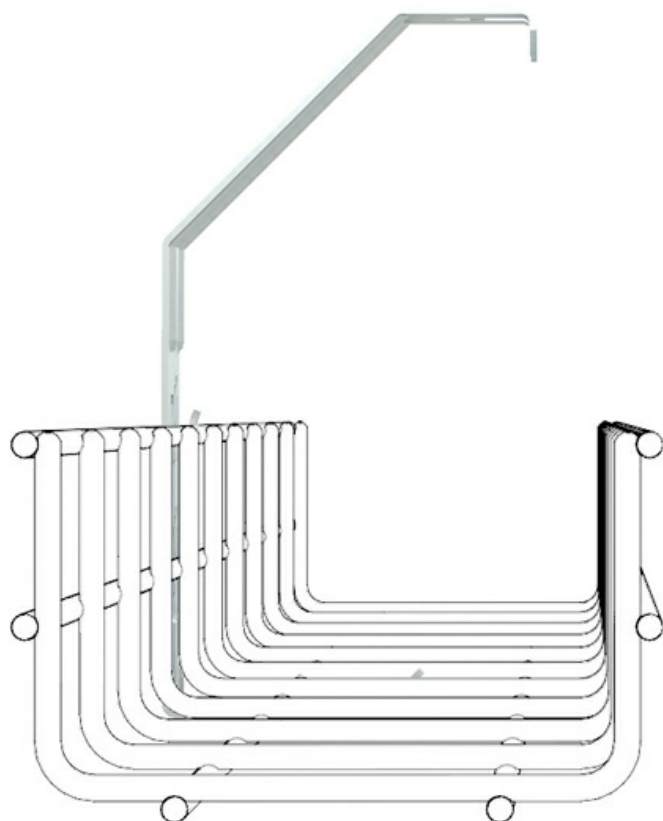

[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

