


RLH Tee

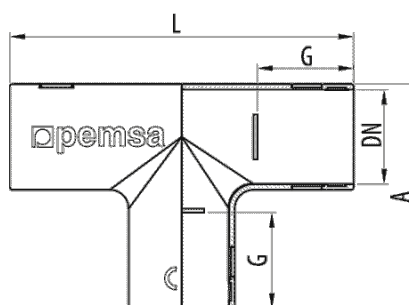

Description

Tee for RLH rigid conduit for the protection of electrical cables in building applications. Manufactured in halogen-free thermoplastic material (PC + ABS) with an IP44 protection rating. Push fit connection system to the conduit. Available in grey (RAL 7035).

Advantages

Available in various sizes: NW16, NW20, NW25 and NW32.

For connection of RLH rigid and CLH corrugated conduits.

Quick assembly via plug-in connection for conduits and accessories. It allows opening to access and manipulate the cables.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

Applications

Suitable for rigid halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions



COLOUR Grey RAL 7035	DN NW16, NW20, NW25, NW32	M Polycarbonate + ABS	IP IP44	T -15 / 90 °C
---	--	--	--	---

ETIM 10
EC002922

DN		L _(mm)	A _(mm²)	Ref.	kg/u	
NW16	16.5	64	42	55082016	0,009	25
NW20	20.5	76	50	55082020	0,013	25
NW25	25.5	91	60	55082025	0,020	25
NW32	30.5	108	72	55082032	0,029	15

LN - Brass or Nickel-plated brass

TPV - Thermoplastic

