


Conduit RPVC1250

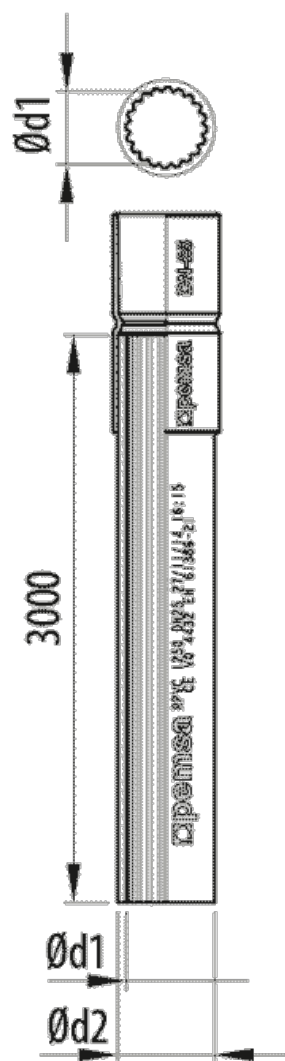

Description

RPVC rigid conduit for the protection of electrical cables in building applications. Made of plastic material (PVC) with an IP44 protection index, compression resistance of 1250 N and impact strength of 2 J. Available in grey (RAL 7035), in a wide variety of sizes. RPVC coupler included.

Advantages

Compression resistance grade 4, 1250 N. Suitable for surface installations.

No flame propagation.

Quick assembly via plug-in connection between conduits and fittings.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Speed system that allows the fast introduction and manipulation of cables due to the internal grooves in the conduit.

Applications

Suitable for the protection of electrical wiring in building applications, tertiary sector and industry.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

COLOR	Grey RAL 7035	DN	NW16, NW20, NW25, NW32, NW40, NW50, NW63	M	PVC	EN 61386	4321	1250 N	2 J	IP	IP44
			ETIM 10								
	-5 / 60 °C	Flame retardant	EC001174								

Product data

DN			Ref	kg/u	
NW16	12.4	16	13050116	0,127	57
NW20	16	20	13050120	0,180	57
NW25	20.9	25	13050125	0,236	57
NW32	27.6	32	13050132	0,329	30
NW40	35	40	13050140	0,471	30
NW50	44.8	50	13050150	0,621	15
NW63	56.8	63	13050163	0,936	15

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic