


Conduit RPVC750

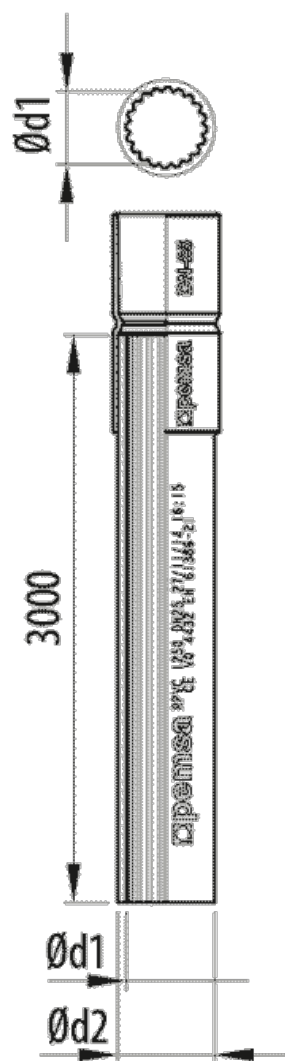

Description

RPVC rigid conduit for the protection of electrical cables in building applications. Made of plastic material (PVC) with an IP44 protection index, compression resistance of 750 N and impact strength of 2 J. Available in grey (RAL 7035), in a wide variety of sizes.

Advantages

It is produced in 3 m lengths for greater convenience of transport and handling.

No flame propagation.

Quick assembly via plug-in connection between conduits and fittings.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Speed system that allows the fast introduction and manipulation of cables due to the internal grooves in the conduit.

Applications

Suitable for the protection of electrical wiring in building applications, tertiary sector and industry.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Conduit RPVC750

Main technical characteristics

Colour Grey RAL 7035	DN NW16, NW20, NW25, NW32, NW40, NW50, NW63	M PVC	Col EC 61386 3321	750 N	2 J	IP44
°C -5 / 60 °C	Flame retardant	ETIM 10 EC001174				

Product data

DN	Ø _{int}	Ø _{ext}	Ref	kg/u	kg
NW16	13.3	16	13060116	0,101	57
NW20	17.2	20	13060120	0,155	57
NW25	22.2	25	13060125	0,198	57
NW32	29	32	13060132	0,273	30
NW40	36.6	40	13060140	0,381	30
NW50	46.4	50	13060150	0,529	15
NW63	58.6	63	13060163	0,762	15

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

