


Flexible Bend FRPVC (Ref: 55091032)

1/2

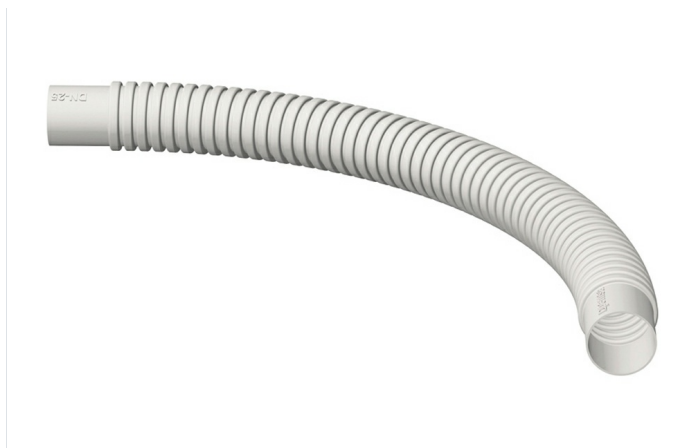

Description

Flexible PVC bend in grey color (RAL 7035) with an IP44 protection rating for RPVC rigid conduits tubes. Accessory is used for the assembly of PVC conduits by a push fit connection, creating adjustable angles due to its flexible structure.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of PVC, not flame retardant.

Protection index EN 60529: IP44.

Quick assembly via plug-in connection between conduits and fittings.

For connection of rigid RPVC conduits.

Applications

Suitable for rigid PVC conduits in building, tertiary and industrial applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC000936	u	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	PVC
Colour	Grey RAL 7035	IP	IP44
DN	NW32	Working temperature range (°C)	-5 / 60 °C
Ø d2 (mm)	33.4	Fire resistance	Flame retardant
L (mm)	390		
kg/u	0,060		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

