


MEGAband Cable Outlet

1/4

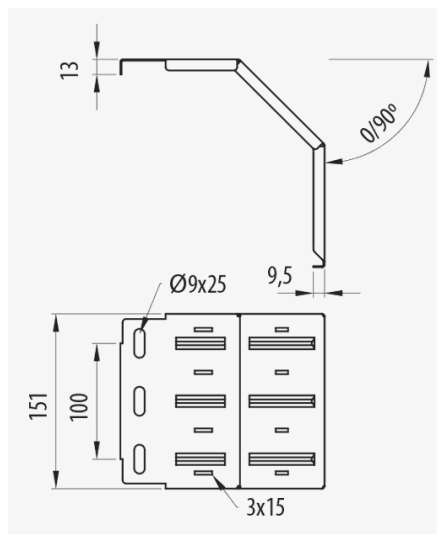

Description

Metal accessory that facilitates the exit of cables, providing the cable with an optimal radius of curvature. It is directly connected to the rung of the Megaband® ladder. Made of steel, with GC Protection System.

Advantages

It is connected directly to the rung of the ladder, by means of the Megaband joint kit or M8 nuts and bolts.

Guarantees the correct curvature of the cable.

Definitive solution: perfect joint.

Applications

Suitable to facilitate the exit of cables, ensuring the cable has an optimum radius of curvature. It connects directly to the Megaband® rung.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

ETIM 10
EC000858

Product data

		REF	kg/u				
GC	Class 6	93930004	0,353	1	Steel with surface coating	-50 / 150 °C	A1 No combustible

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene


NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

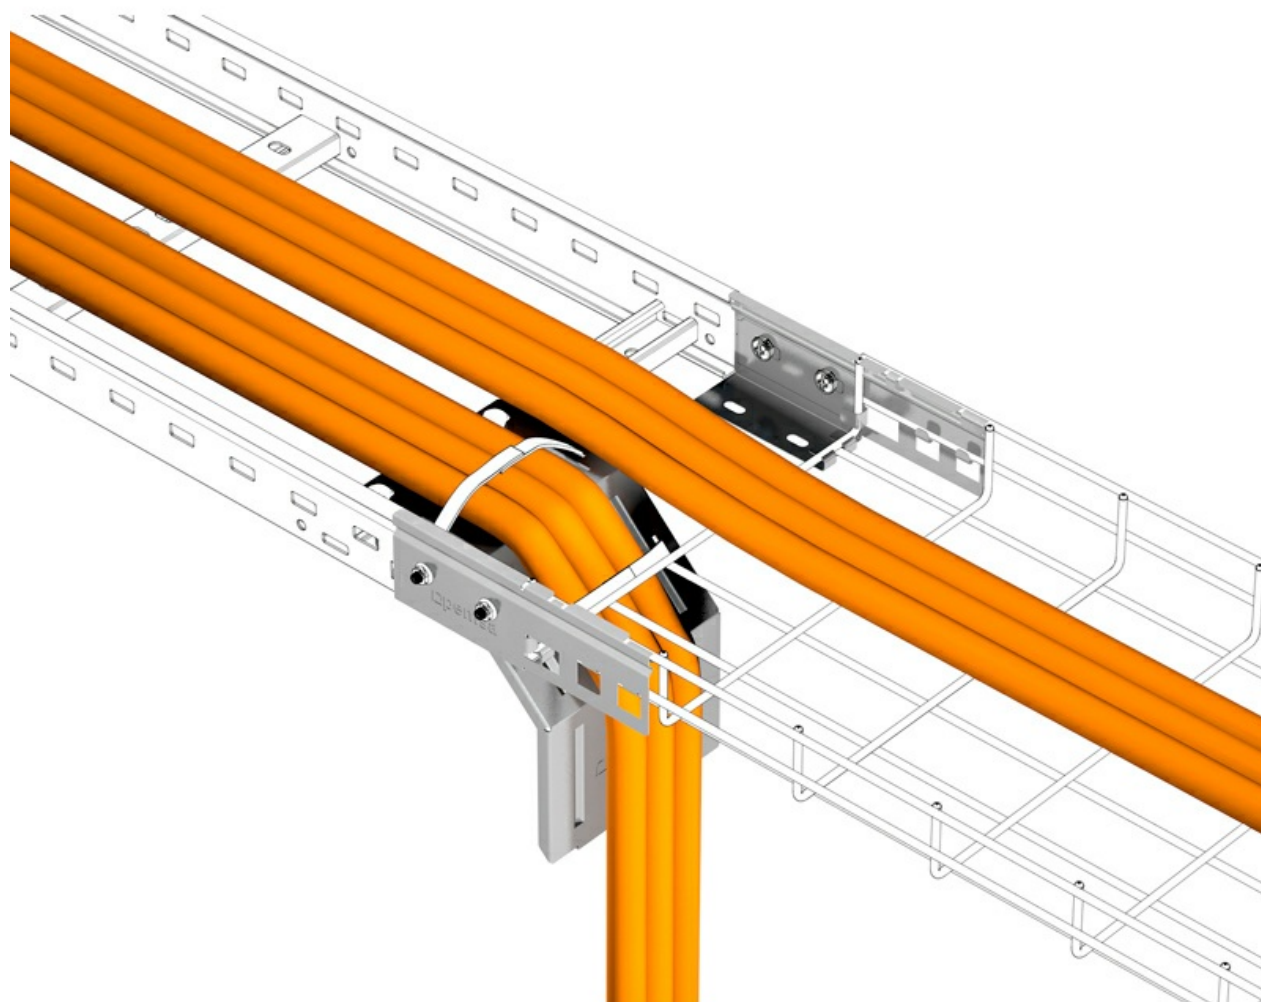

MEGAband Cable Outlet

