


3C Mounting Plate (Ref: 82003175)

1/2

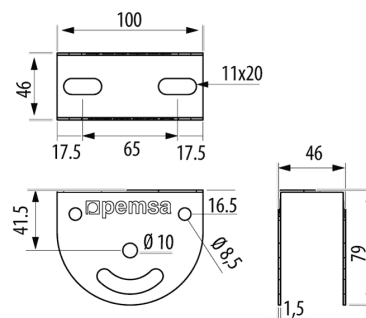

Description

Fixing support for the connection of the 3C Strut to the ceiling, allowing them to have a variable angle that can adapt to tunnel vaults or inclined ceilings. Made from steel, available in various protection systems. With GC protection system

Advantages

Available in PG and GC Protection Systems

CE conformity in accordance to the low voltage directive 2014 /35 /UE and the international product standard IEC 61537

Fixing piece by means of M8x65 screws for the installations of cable trays made up of 3-sided channels.

Its design allows the creation of variable angles, adapting to arches of tunnels, galleries, and sloping walls.

Applications

Support for Cable Trays (rejiband®, pemsaband®, megaband®, among others) in ceiling installations in tunnels, service galleries, buildings or installations in industrial environments.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000896	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 6	
kg/u		0,209	
u		2	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System

CU

PG

EZ

BC

BK8

GC

INOX

PT

AL

LN

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS

PVC

PP

PA6

PA12

PU

PE

NBR

PET

TPV

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic