


Cantilever Arm Brace (Ref: 82002627)

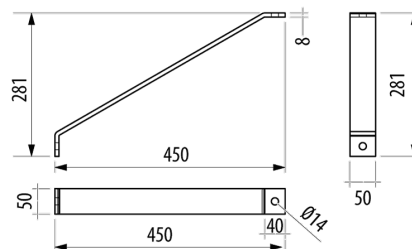

Description

Reinforcement accessory for 41 cantilever arm that acts as support and allows you to achieve a more resistant support system. Made from steel, available in various protection systems.

Advantages

Available in GC Protection Systems and INOX, Stainless steel AISI 316L

Fixing with M6, M8 and M10 screws.

It allows to achieve a more reinforced support system.

Load values according to international standard IEC 61537.

Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions



Product data			
ETIM 10		EC001003	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		4,517	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 6	
kg/u		1,744	
u		5	
Material		Steel with surface coating	
Working temperature range (°C)		-25 / 105 °C	
Fire resistance		A1 No combustible	

 **Protection System**

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

 **Insulating materials**

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications

