
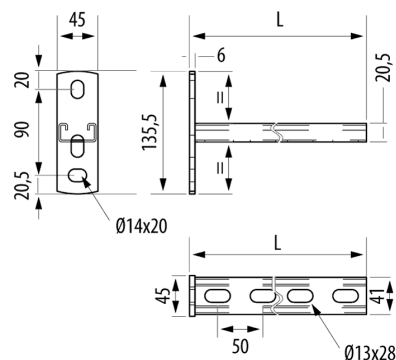


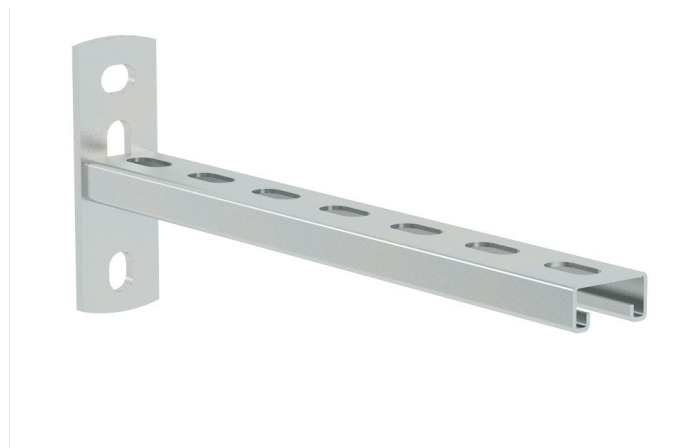

Description

41x21mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 300 mm, With GC protection system. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

Advantages

Available in PG and GC Protection Systems

Available in widths from 100 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Load values according to international standard IEC 61537.

Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions



Product data

ETIM 10	EC001003	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	2,02	Material	Steel with surface coating
Protection System	GC	SWL (kg)	146
Finish	HDG, Hot Dip Galvanised	Working temperature range (°C)	-25 / 105 °C
Resistance Class	Class 6	Fire resistance	A1 No combustible
Width (mm)	300		
kg/u	0,780		

Protection System


- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



Load diagrams

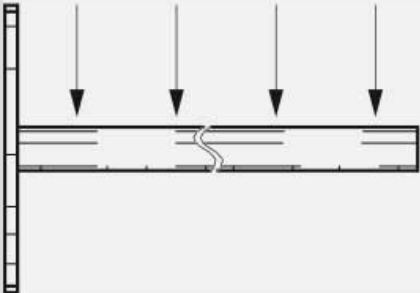↓ CTA ↓ (kg)		kg
	100	242
	200	196
	300	146
	500	94
	1000	36


Product applications





www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



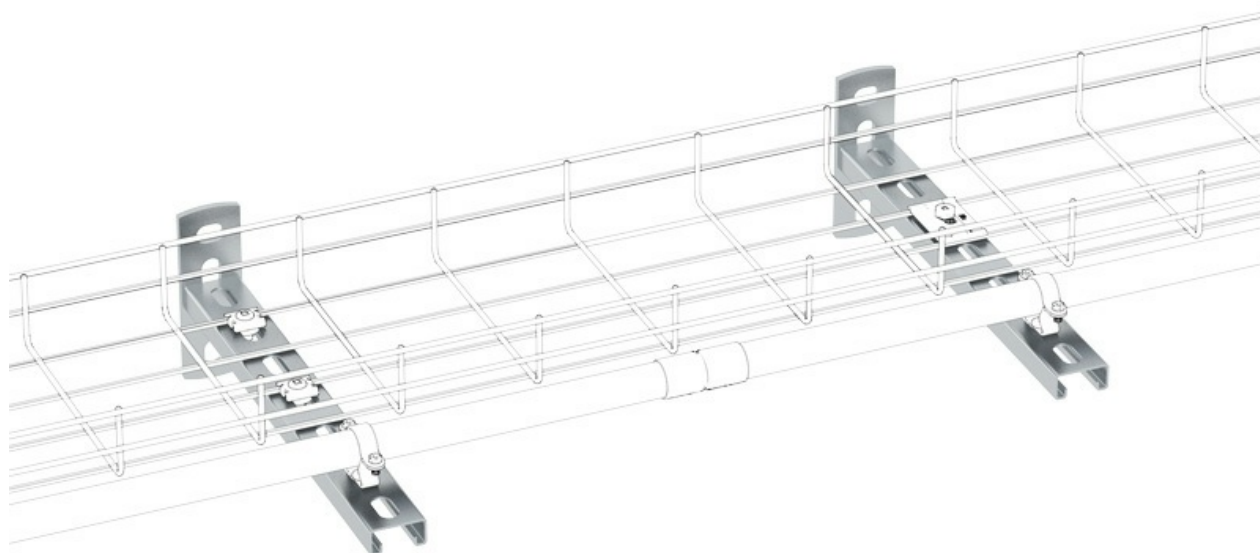

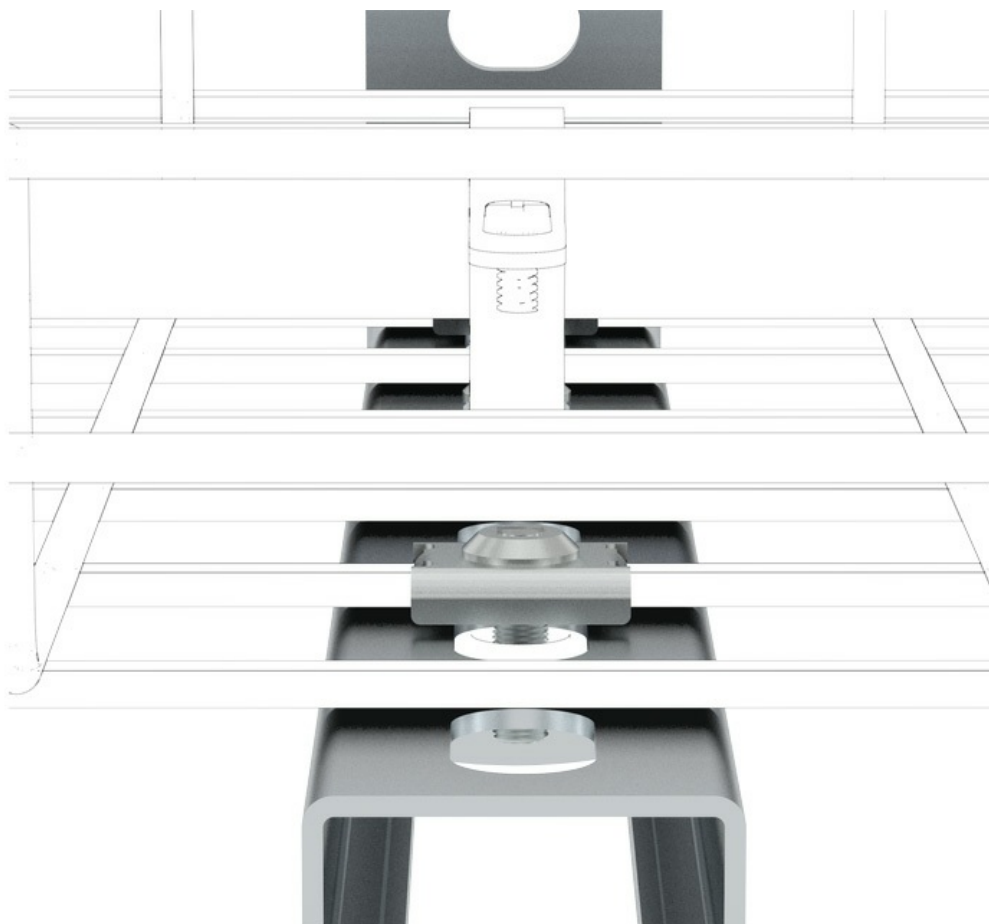

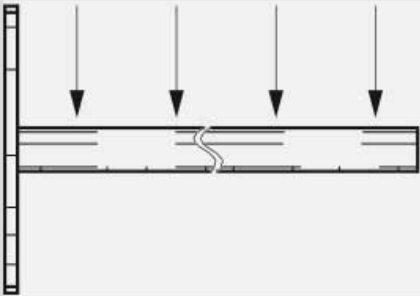↓ CTA ↓ (kg)	⏏	kg
	100	242
	200	196
	300	146
	500	94
	1000	36

