


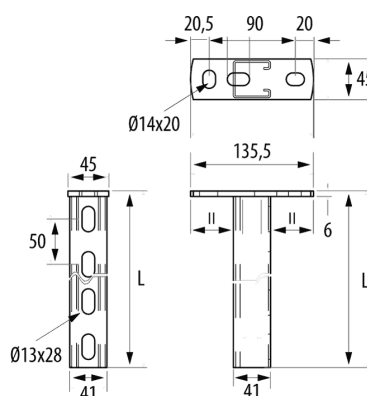

### Description

41x21mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 500 mm, With INOX protection system. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

### Advantages

Available in PG and GC Protection Systems

Available in widths from 100 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Load values according to international standard IEC 61537.

### Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

### Solutions



## Product data

|                                              |                           |                                       |                            |
|----------------------------------------------|---------------------------|---------------------------------------|----------------------------|
| <b>ETIM 10</b>                               | EC001003                  | <b>u</b>                              | 1                          |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> | 7,381                     | <b>Material</b>                       | Acero inoxidable AISI 316L |
| <b>Protection System</b>                     | INOX                      | <b>SWL (kg)</b>                       | 165                        |
| <b>Finish</b>                                | Stainless Steel AISI 316L | <b>Working temperature range (°C)</b> | -25 / 105 °C               |
| <b>Resistance Class</b>                      | Class 9D                  | <b>Fire resistance</b>                | E90 (90 min. 1000°C)       |
| <b>Width (mm)</b>                            | 500                       |                                       |                            |
| <b>kg/u</b>                                  | 1,390                     |                                       |                            |

## 🔒 Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## 🧊 Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester


**TPV** - Thermoplastic





## Load diagrams

□ □


## Product applications

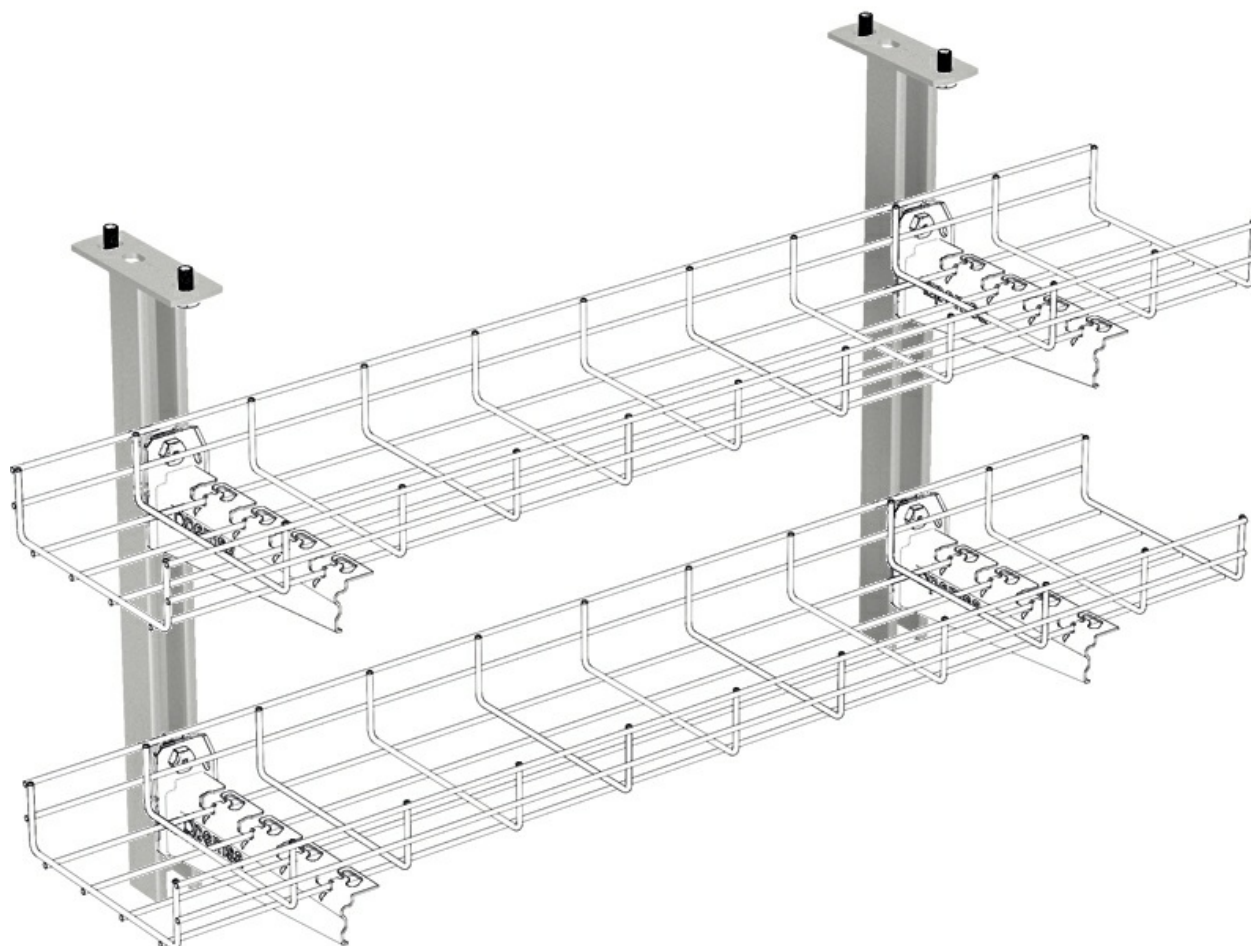


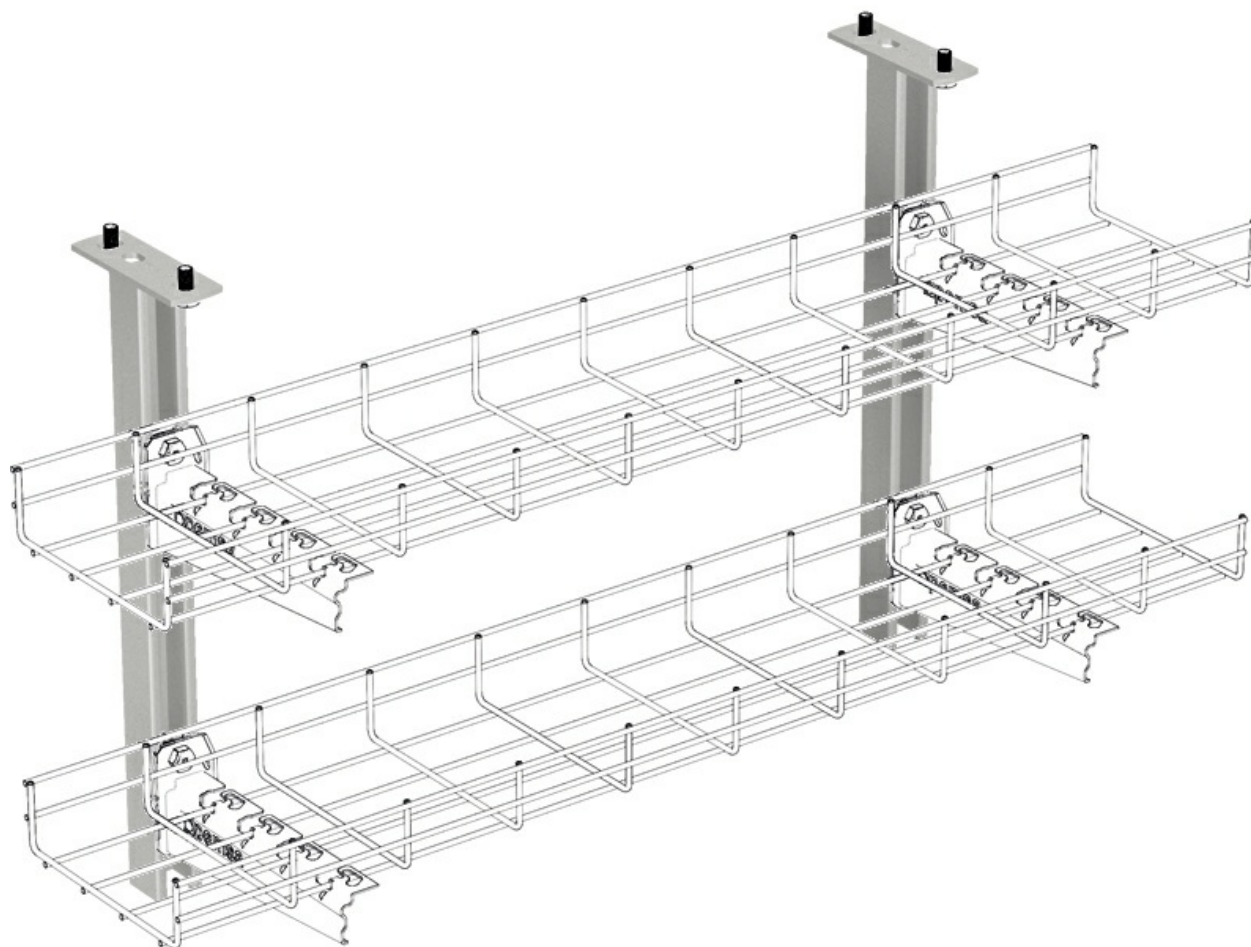


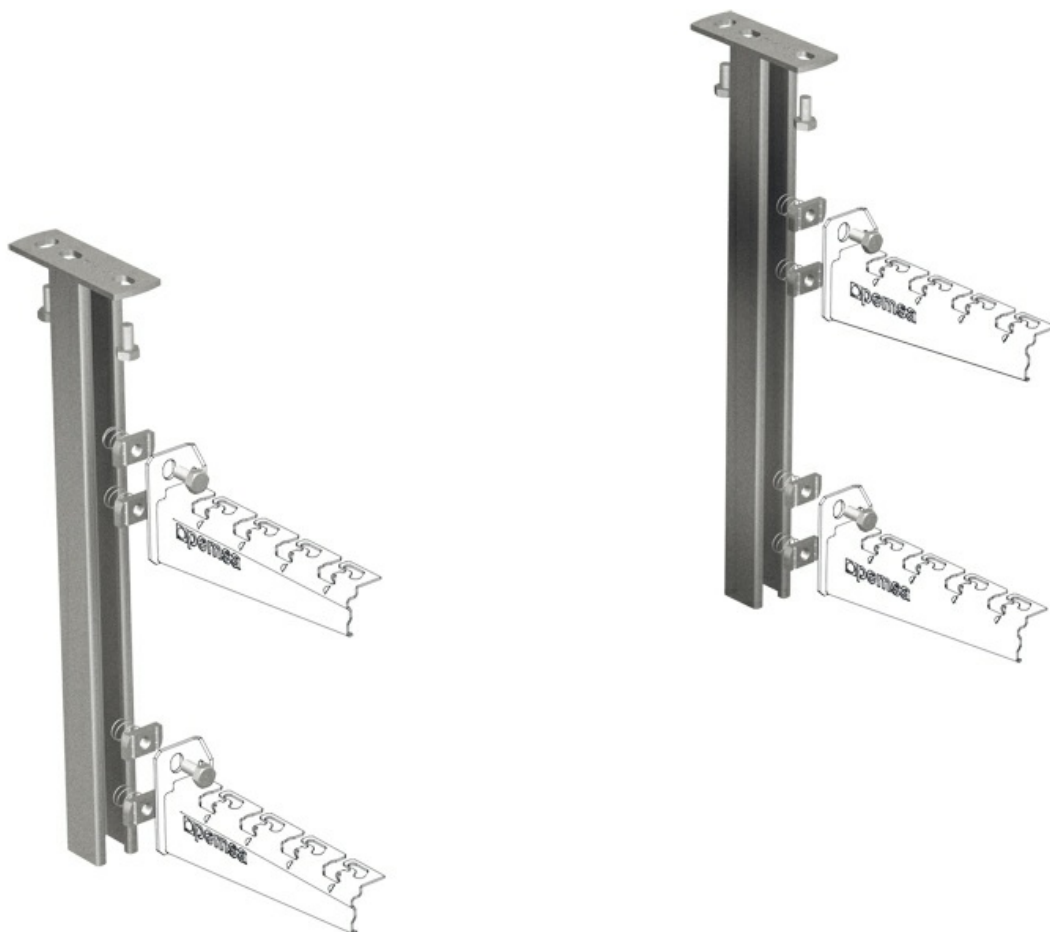





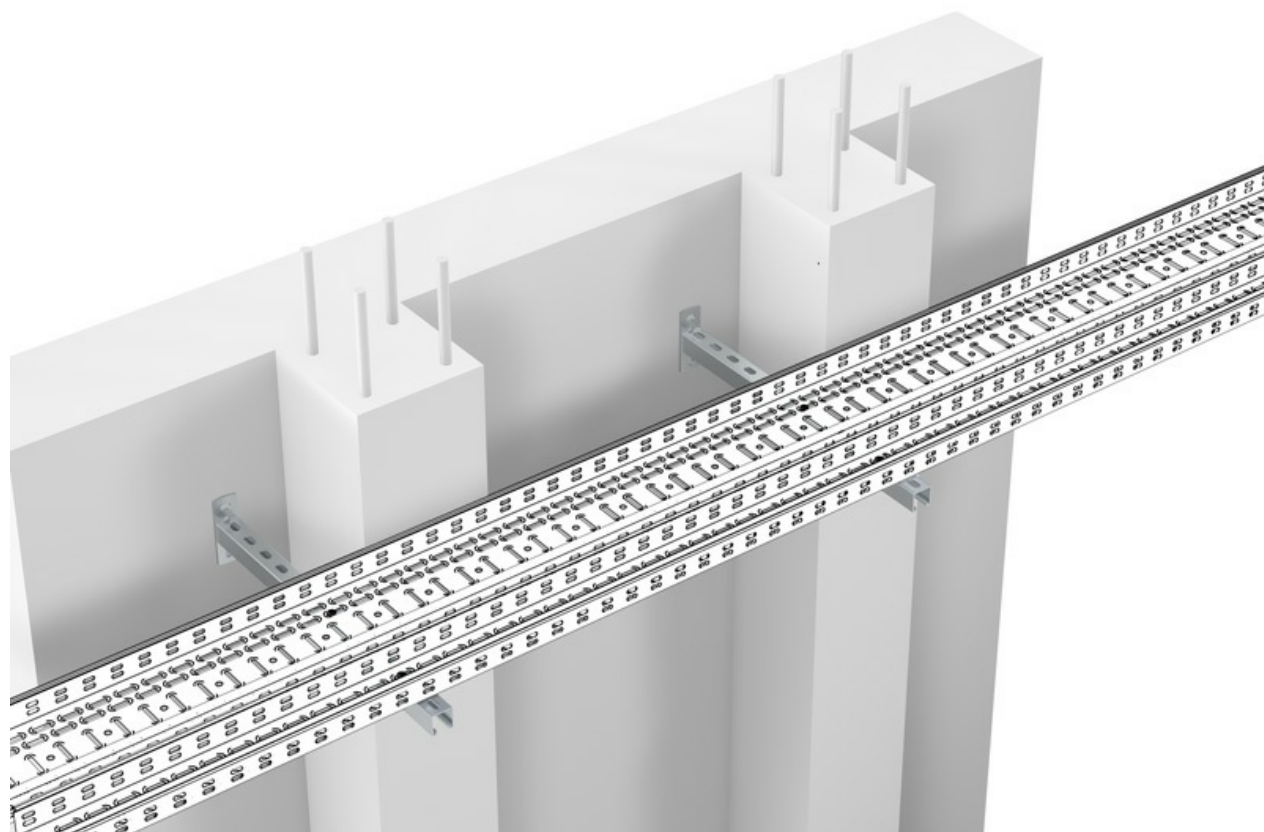

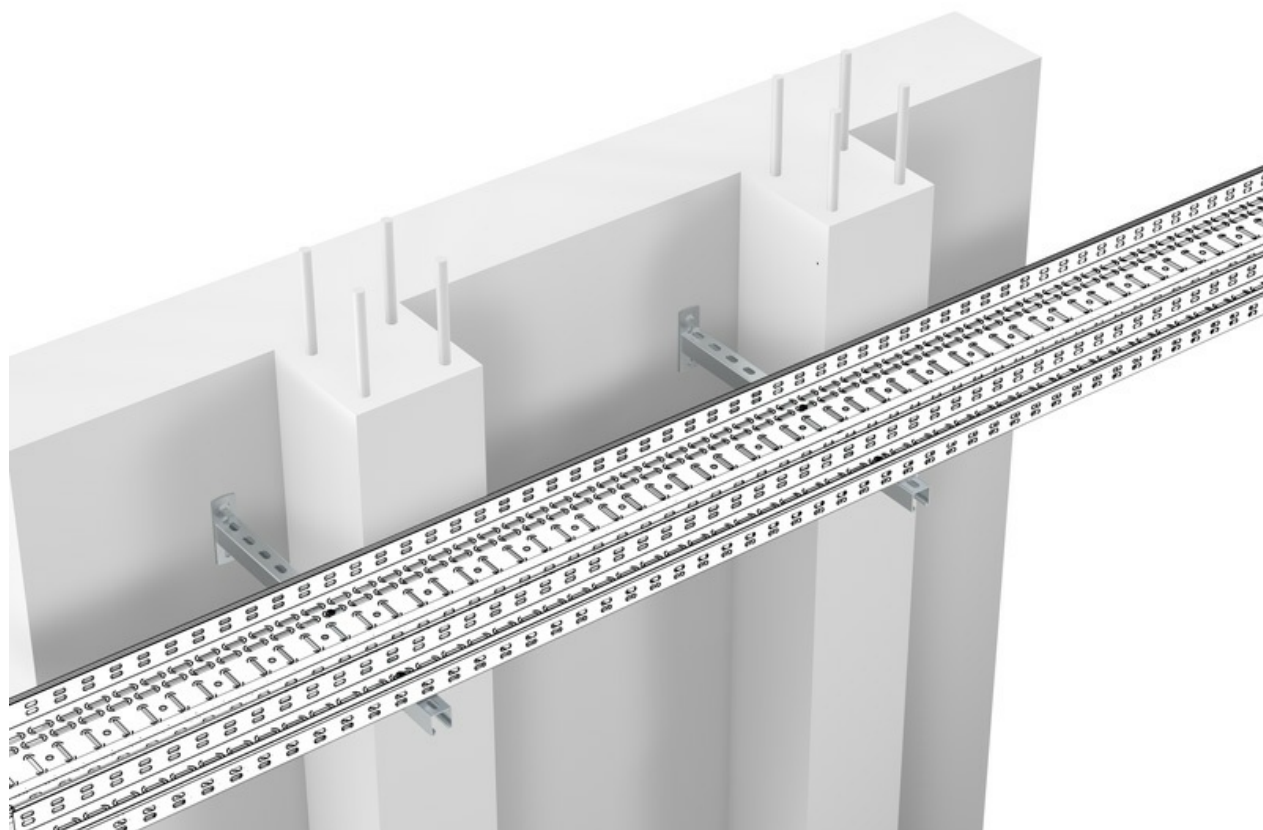


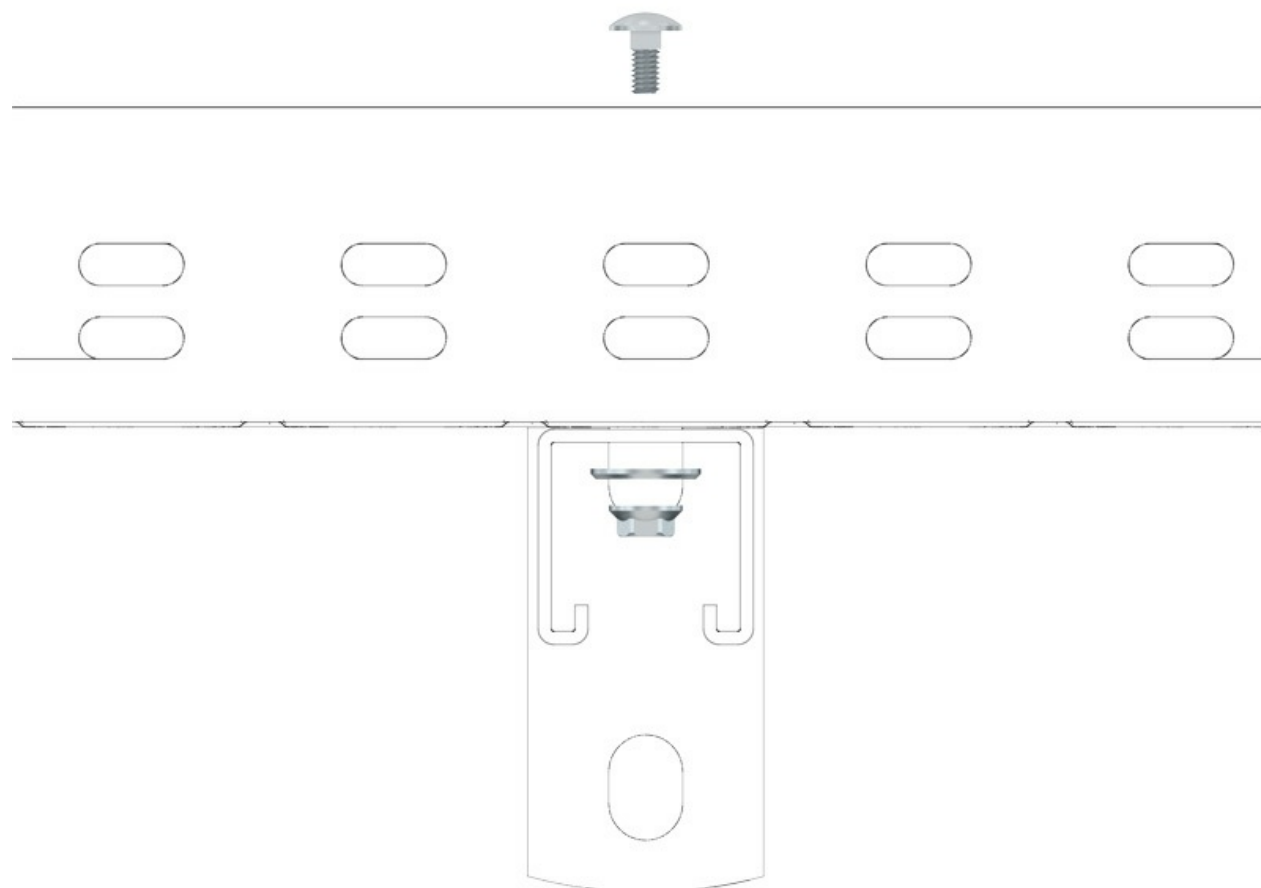

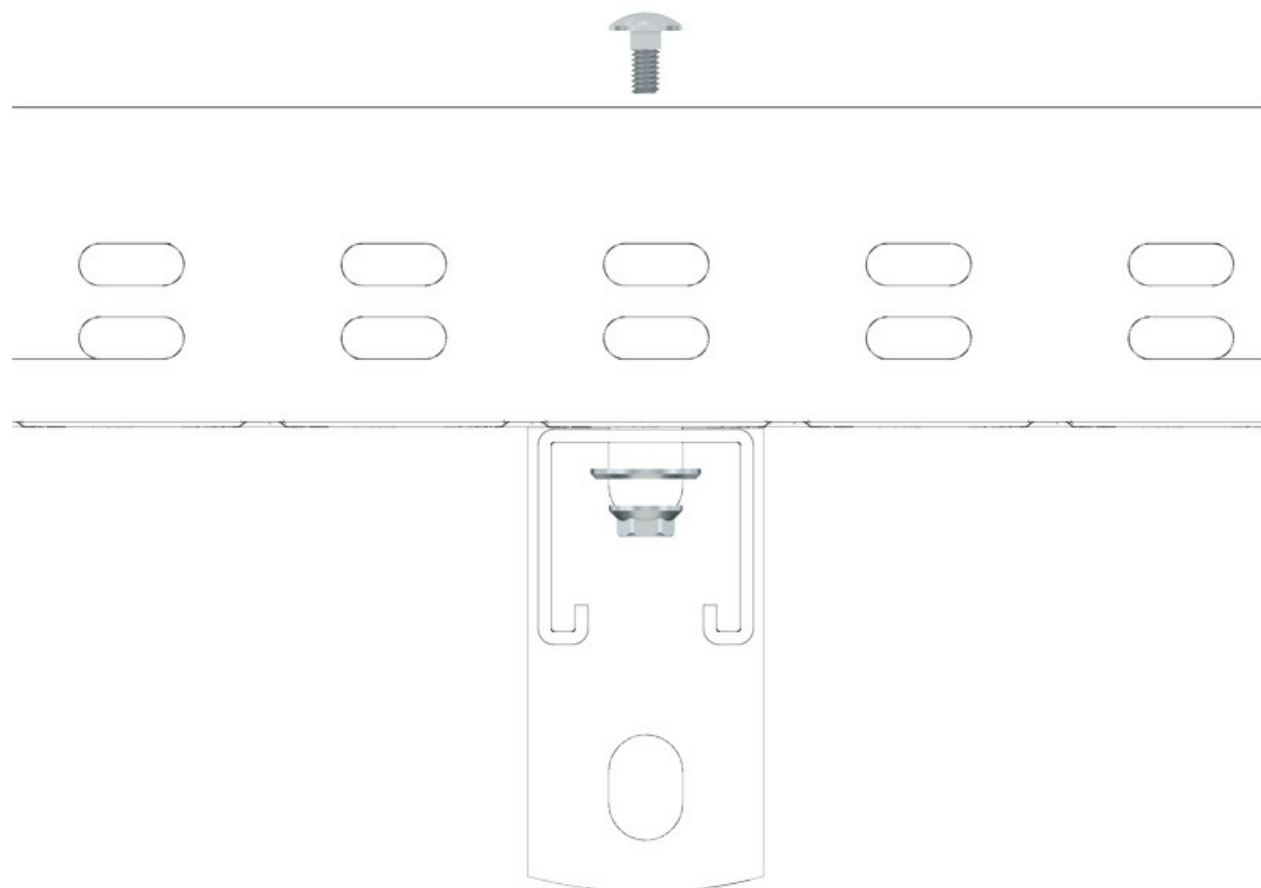
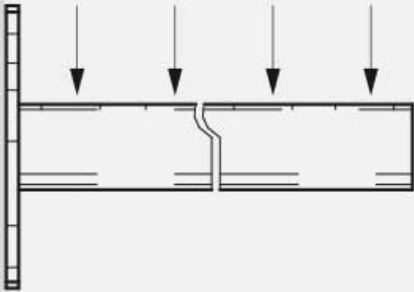
| ↓CTA↓ (kg)                                                                        | ↔    | kg  |
|-----------------------------------------------------------------------------------|------|-----|
|  | 200  | 358 |
|                                                                                   | 300  | 262 |
|                                                                                   | 500  | 165 |
|                                                                                   | 600  | 141 |
|                                                                                   | 800  | 107 |
|                                                                                   | 1000 | 85  |

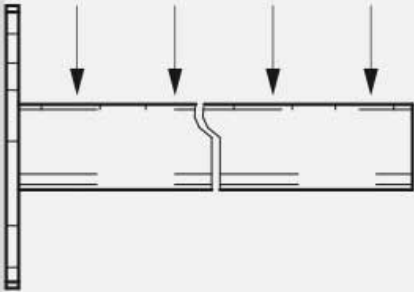

| ↓CTA↓ (kg)                                                                        |  | kg  |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----|
|  | 200                                                                                | 358 |
|                                                                                   | 300                                                                                | 262 |
|                                                                                   | 500                                                                                | 165 |
|                                                                                   | 600                                                                                | 141 |
|                                                                                   | 800                                                                                | 107 |
|                                                                                   | 1000                                                                               | 85  |

