


Side Support 60 (Ref: 62061060)

1/14

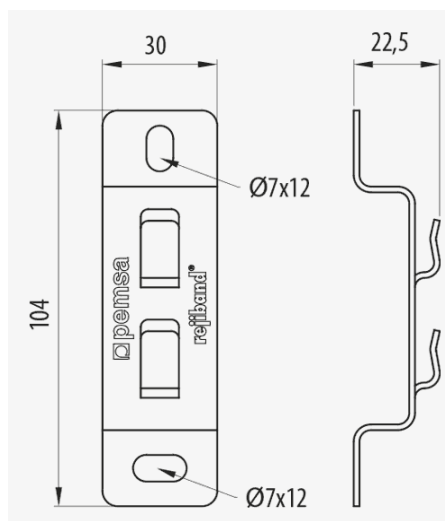

Description

Rejiband® support in steel used for the wall installation of the Rejiband® wire mesh tray 60 mm high and 60, 100 and 150 mm wide. With INOX protection system, I316L finish. Can also be used for ceiling installation with rod. Quick assembly thanks to the Click system of connection without the need of screws. Available in various Protection Systems.

Advantages

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

It allows the introduction of cables into the tray from the side.

Fixing by quick mount click system.

Can be used for ceiling installations with two rejiband trays using a bracket on each side of the tray.

Suitable for ceiling installation using an M8 threaded rod. It allows easy adjustment on the rod and only requires a nut for fixing.

Applications

Suitable for wall and ceiling mounting with threaded rod of Rejiband® wire mesh tray 60 mm wide and widths of 100 and 150. Suitable for electrical and telecommunication installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC001003	Material	Acero inoxidable AISI 316L
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		SWL (kg)	25
Protection System	INOX	Working temperature range (°C)	-50 / 150 °C
Finish	Stainless Steel AISI 316L	Fire resistance	A1 No combustible
Resistance Class	Class 9D		
kg/u	0,042		
u	25		

🔒 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

🏠 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

