


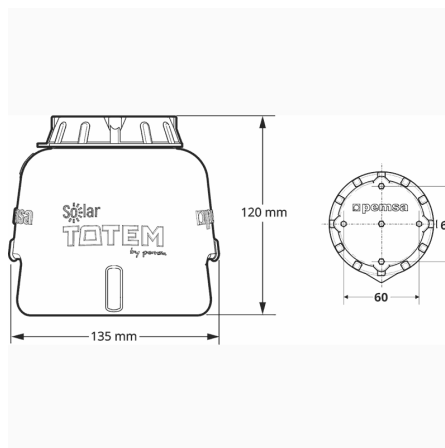

Description

Multifunctional raised mounting Support for Wire mesh tray and Cable tray installations and other functional assemblies for cable management in Solar Roof installations and other general applications on roofs. The system consists of a watertight container, closed by a threaded cap that guarantees its tightness while providing on its external part the necessary housings for fixing the different anchoring accessories for the cables trays or conduits to be installed. It is supplied in Kit format, including additional parts for fixing these cable management systems such as a Central Hanging plate with BK8 protection system, 2 units of the self-locking screw, and 2 units of flat washers in INOX protection system, I304 finish.

Advantages

Applications

The Solar Totem installation is suitable for: - Photovoltaic installations in flat solar roofs where drilling is not possible - Flat solar roofs on waterproof asphalt sheets - Solar roofs on concreted ground or with a gravel layer. - Intermediate point for the creation of a support point for installations with large spans or distances between supports. - Support and elevation of cable trays on the ground in industrial or tertiary facilities.

Solutions



RENEWABLE ENERGIES SERVICE AND RETAIL



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC000022	SWL (kg)	100
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Working temperature range (°C)	-15 / 90 °C
Colour	Black RAL 9005	Fire resistance	A1 No combustible
kg/u	0,199		
u	4		
Material	POLIETILENO,POLIPROPILENO		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Load diagrams

Características técnicas		
Technical features		
	Altura <i>Height</i>	120 mm
	Diámetro <i>Diameter</i>	135 mm
	Peso con relleno <i>Weight with filling</i>	900 gr
	Material <i>Raw material</i>	Polipropileno y polietileno <i>Polypropylene & polyethylene</i>
	Carga máxima <i>Maximun load</i>	100 kg
	Distancia entre soportes <i>Support span</i>	1 - 1,5m
	Resistente UV <i>UV resistant</i>	Alta <i>High</i>
	Temperatura de trabajo <i>Working temperature</i>	-15°C + 90°C



Características técnicas

Technical features

	Altura <i>Height</i>	120 mm
	Diámetro <i>Diameter</i>	135 mm
	Peso con relleno <i>Weight with filling</i>	900 gr
	Material <i>Raw material</i>	Polipropileno y polietileno <i>Polypropylene & polyethylene</i>
	Carga máxima <i>Maximun load</i>	100 kg
	Distancia entre soportes <i>Support span</i>	1 - 1,5m
	Resistente UV <i>UV resistant</i>	Alta <i>High</i>
	Temperatura de trabajo <i>Working temperature</i>	-15°C + 90°C

Product applications



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."





