


PEMSA**band** Inside Hanging Plate

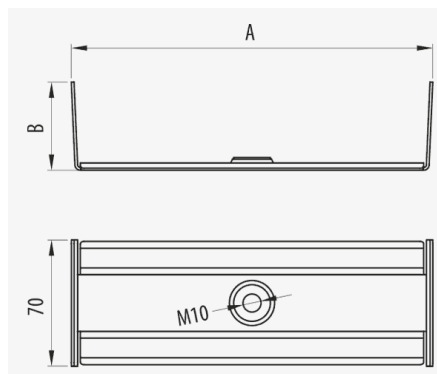

Description

Advantages

Applications

Solutions



Main technical characteristics						ETIM 10
 60	 100, 150, 200, 300, 400	 10	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	EC001003

Product data					
Ⓢ	Class EC 61537		Ref	kg/u	CTA J 88-1
PG	Class 3	100	70122210	0,162	40
PG	Class 3	150	70122215	0,204	35
PG	Class 3	200	70122220	0,247	27
PG	Class 3	300	70122230	0,333	20
PG	Class 3	400	70122240	0,417	
GC	Class 8	100	70132210	0,167	40
GC	Class 8	150	70132215	0,211	35
GC	Class 8	200	70132220	0,255	27
GC	Class 8	300	70132230	0,343	20
GC	Class 8	400	70132240	0,430	

Ⓢ Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Ⓢ Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic