


PEMSA^{band} Inside Hanging Plate (Ref: 70122240)

1/3

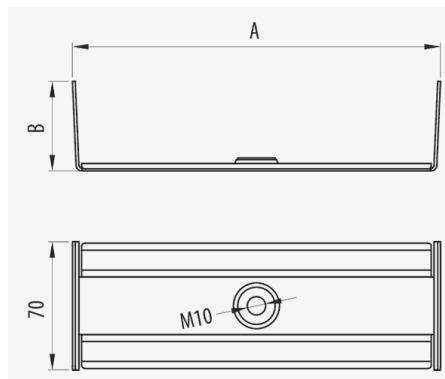

Description

Inside Suspension for Pemsaband® tray. Width 400 mm, With PG protection system. M10 threaded rod fixing that is concealed inside the tray. Attach the rod to the tray by means of an integrated thread. Available in different sizes and Protection Systems.

Advantages

Available in widths from 100 to 400 mm and in different protection systems: PG and GC

The support is concealed inside the tray giving an aesthetic appearance of the trays.

Easy and quick to install.

To connect the suspension to the tray, use the Pemsaband® M6 Joining Kit.

For ceiling mounting with M10 rods. No need for any additional nuts as the plate has an integrated thread.

Applications

Recommended for ceiling installation of Pemsaband® trays, concealing the suspension inside the tray. Suitable for the management of cables in electrical and telecommunications installations in public buildings, commercial centres or other buildings with a highly aesthetic component.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC001003	kg/u	0,417
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,348	u	10
Protection System	PG	Material	Steel with surface coating
Finish	PG3, Pregalvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 3	Fire resistance	A1 No combustible
Flange (mm)	60		
Width (mm)	400		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Ceiling Supports

10/10/2026

PEMSA**band** Inside Hanging Plate (Ref: 70122240)

3/3

Product applications

□ □ □ □ □ □