


**Inside Riser Cover Click** ( Ref: 73065500 )

1/2

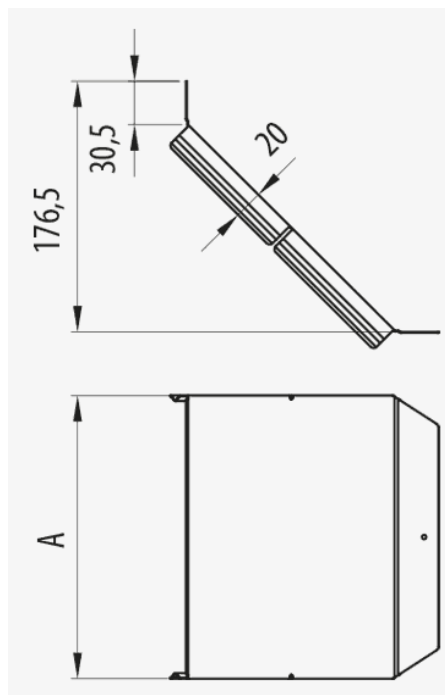

**Description**

Metal cover for the protection of cables in the 90° Click Inside Riser. Width 500 mm, With INOX protection system, I316L finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

**Advantages**

Easy access to the riser in the case of having to make any modification to the electrical installation.

The ends have an overlap to improve the fit with straight lids.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Press-fit click system requiring no additional parts.

**Applications**

It is used for the protection of wiring in the installation of Pemsaband® One perforated and solid tray installations where the 90° Click Inside Riser is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

**Solutions**



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



| Product data                          |                           |                                |                            |
|---------------------------------------|---------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC002402                  | kg/u                           | 0,764                      |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 4,059                     | u                              | 1                          |
| Protection System                     | INOX                      | Material                       | Acero inoxidable AISI 316L |
| Finish                                | Stainless Steel AISI 316L | Working temperature range (°C) | -50 / 150 °C               |
| Resistance Class                      | Class 9D                  | Fire resistance                | A1 No combustible          |
| Width (mm)                            | 500                       |                                |                            |
| R (mm)                                | 100                       |                                |                            |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |