
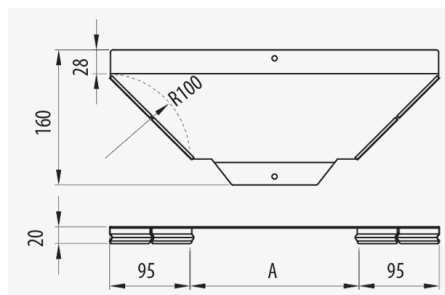


## Side Entry Cover Click ( Ref: 73033300 )

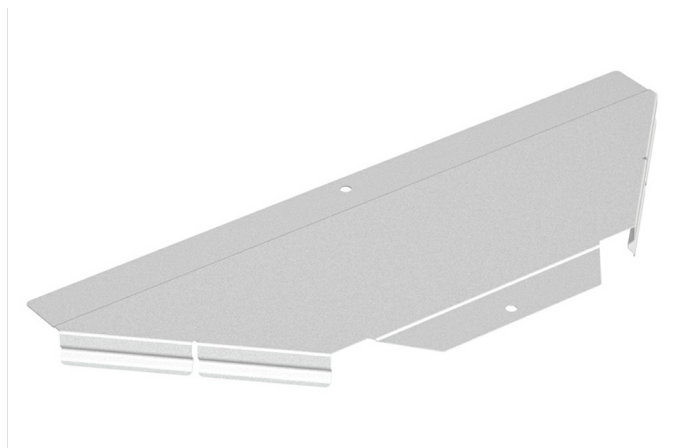

### Description

Metal cover for the protection of cables in the Click Side Entry. Width 300 mm, With GC protection system, HDG finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

### Advantages

The ends have an overlap to improve the fit with straight lids.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Press-fit click system requiring no additional parts.

### Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforated and solid tray installations where the Click Side Entry is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

### Solutions




| Product data                          |                         |                                |                            |
|---------------------------------------|-------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC002401                | kg/u                           | 0,446                      |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 1,156                   | u                              | 1                          |
| Protection System                     | GC                      | Material                       | Steel with surface coating |
| Finish                                | HDG, Hot Dip Galvanised | Working temperature range (°C) | -50 / 150 °C               |
| Resistance Class                      | Class 5                 | Fire resistance                | A1 No combustible          |
| Width (mm)                            | 300                     |                                |                            |
| R (mm)                                | 100                     |                                |                            |

| 🔒 Protection System               |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| 🧊 Insulating materials                    |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

**Side Entry Cover Click** ( Ref: 73033300 )

**Product applications**

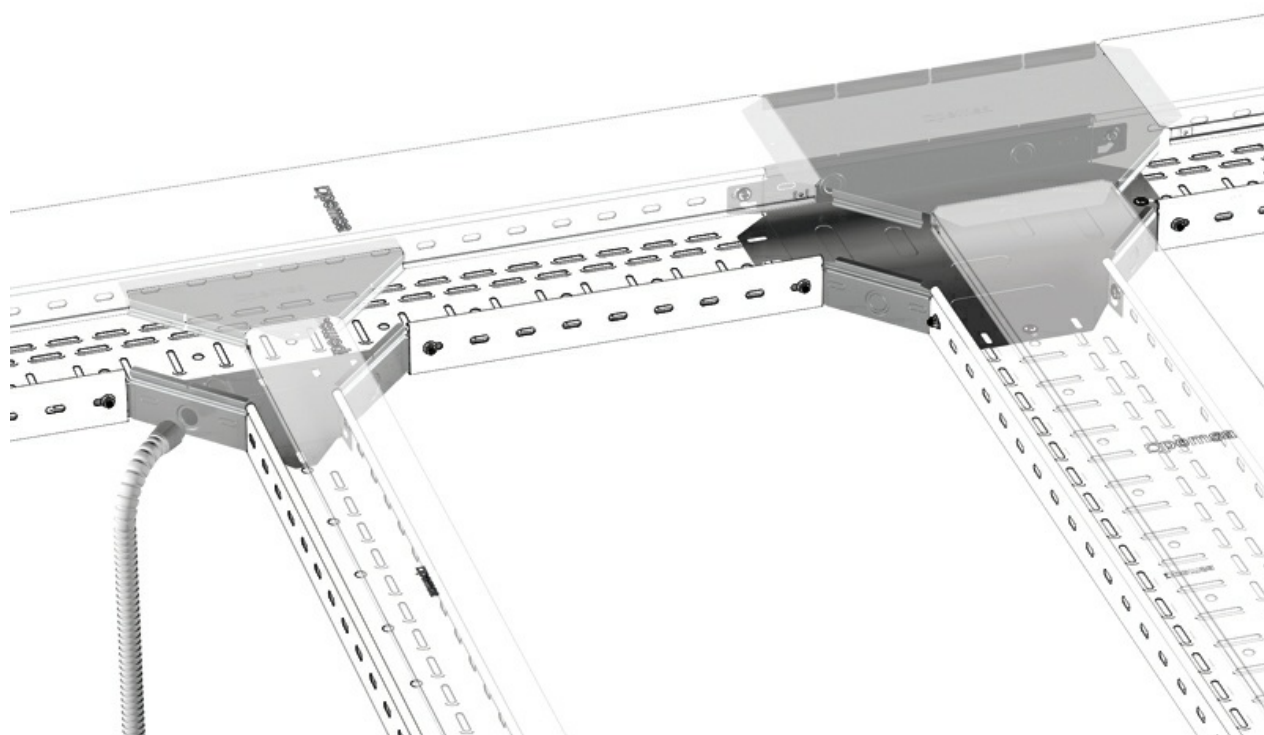

**Side Entry Cover Click** ( Ref: 73033300 )

