
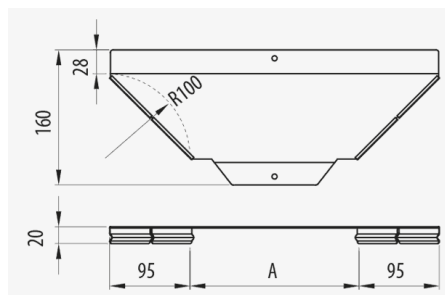


## Side Entry Cover Click ( Ref: 73063300 )

1/4

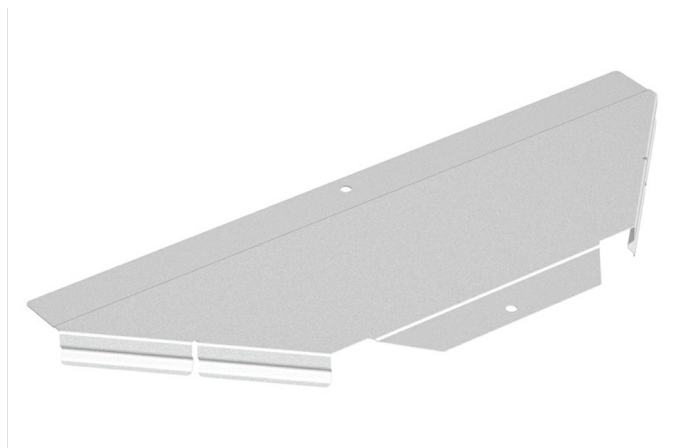

### Description

Metal cover for the protection of cables in the Click Side Entry. Width 300 mm, With INOX protection system, I316L finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

### Advantages

The ends have an overlap to improve the fit with straight lids.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Press-fit click system requiring no additional parts.

### Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforated and solid tray installations where the Click Side Entry is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




| Product data                          |  |                            |  |
|---------------------------------------|--|----------------------------|--|
| ETIM 10                               |  | EC002401                   |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | 1,929                      |  |
| Protection System                     |  | INOX                       |  |
| Finish                                |  | Stainless Steel AISI 316L  |  |
| Resistance Class                      |  | Class 9D                   |  |
| Width (mm)                            |  | 300                        |  |
| R (mm)                                |  | 100                        |  |
| kg/u                                  |  | 0,363                      |  |
| u                                     |  | 1                          |  |
| Material                              |  | Acero inoxidable AISI 316L |  |
| Working temperature range (°C)        |  | -50 / 150 °C               |  |
| Fire resistance                       |  | A1 No combustible          |  |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

**Side Entry Cover Click** ( Ref: 73063300 )

**Product applications**

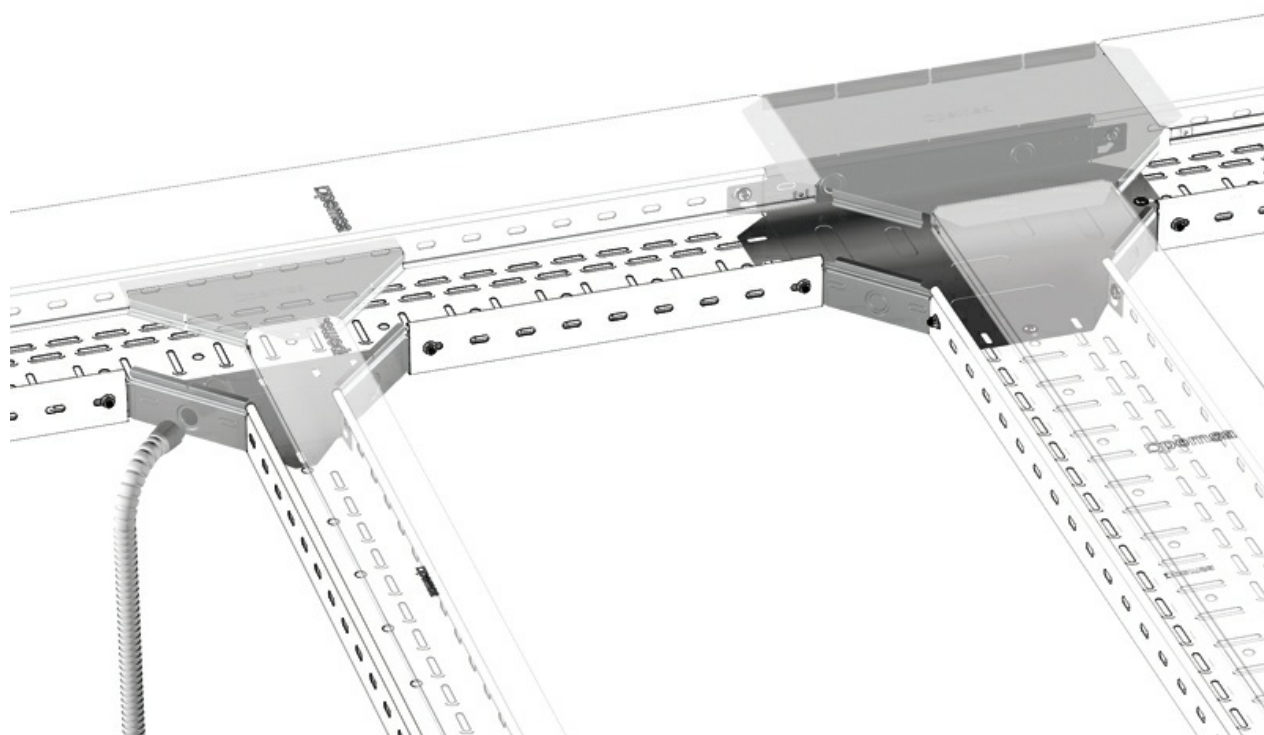

**Side Entry Cover Click** ( Ref: 73063300 )

