


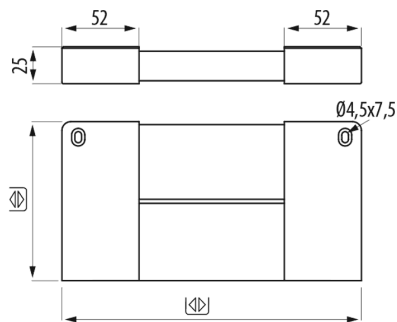

Description

Cover for the final closure of Metatray® cables trays and trunkings. Of 60 mm height, Width 300 mm. Made of PVC-based Thermoplastic insulating material. Grey RAL 7035 colour.

Advantages

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Insulating material, electrical safety and reduced maintenance costs.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Provides IP2X or IP4X protection grade and Impact Grade 20 J (EN 61537) or IK10 (EN50085)

Protection and maximum tightness, IP2X or IP4X.

Applications

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC001574	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0	
Colour		Grey RAL 7035	
Flange (mm)		60	
Width (mm)		300	
kg/u		0,123	
u		2	
Material		PVC	
Working temperature range (°C)		-20 / 60 °C	
Fire resistance		GRADO UL94: V0	
UV Behaviour		Resistant acc. to UL568	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic



Product applications



