


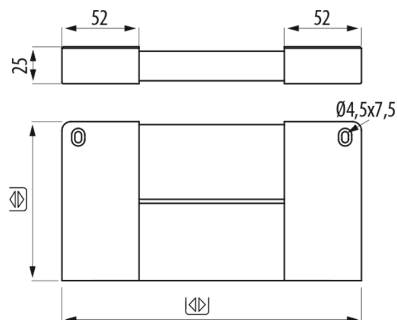

Description

Cover for the final closure of Metatray® cables trays and trunkings. Of 100 mm height, Width 200 mm. Made of PVC-based Thermoplastic insulating material. Grey RAL 7035 colour.

Advantages

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Insulating material, electrical safety and reduced maintenance costs.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Provides IP2X or IP4X protection grade and Impact Grade 20 J (EN 61537) or IK10 (EN50085)

Protection and maximum tightness, IP2X or IP4X.

Applications

Solutions



Product data			
ETIM 10		EC001574	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0	
Colour		Grey RAL 7035	
Flange (mm)		100	
Width (mm)		200	
kg/u		0,135	
u		2	
Material		PVC	
Working temperature range (°C)		-20 / 60 °C	
Fire resistance		GRADO UL94: V0	
UV Behaviour		Resistant acc. to UL568	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications



