


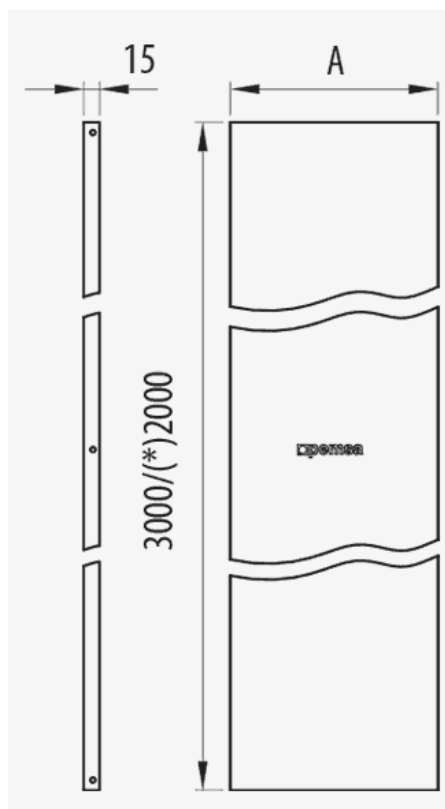

Description

Straight metal cover for the protection of the straight sections of the Pemsaband® PQU trays. Width 300 mm. Approved according to CEPSA and REPSOL specifications. Made of steel and with GC Protection System 85 microns thick.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

The sheet metal tray, plus the cover, becomes a protective trunking in grade IP2X.

Optimum adjustment on the metal trays giving them a greater protection.

Easy and fast assembly system.

Applications

Used for the protection of the Electrical and Telecommunications Wiring housed in Pemsaband® PQU trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



PQU Straight Cover (Ref: 70393030)

2/2

Product data

ETIM 10	EC002403	kg/u	5,500
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	28,49	u	2
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 8	Fire resistance	A1 No combustible
Width (mm)	300		
Length (m)	2		

🔒 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

🏠 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic