


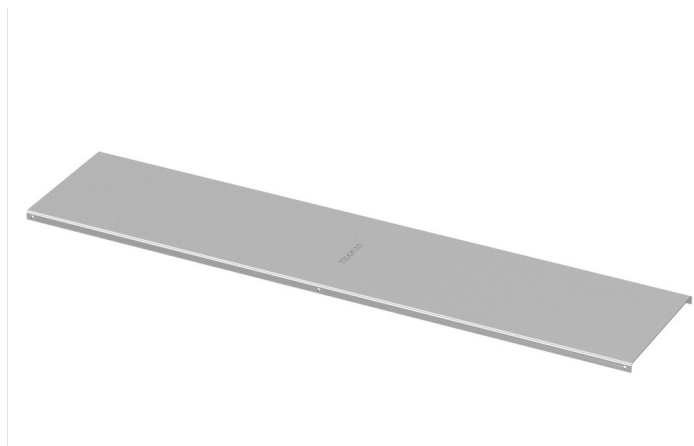

### Description

Metal cover to protect the straight sections of the Pemsaband® PQU AL trays. Made from aluminum alloy 1050H24. Width 600 mm, With AL protection system

### Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

Light and easy to install due to the low density of the aluminium against other metallic materials.

It allows covering the straight sections of the Pemsaband® PQU AL cable trays, achieving maximum protection of the wiring.

CEPSA product approval. Designed according to ESP-2208-5 specification.

### Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

### Solutions



|                                              |                   |                                       |                   |
|----------------------------------------------|-------------------|---------------------------------------|-------------------|
| <b>ETIM 10</b>                               | EC002403          | <b>u</b>                              | 3                 |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> |                   | <b>Material</b>                       | Aluminum          |
| <b>Protection System</b>                     | AL                | <b>Working temperature range (°C)</b> | -50 / 150 °C      |
| <b>Finish</b>                                | 1050H24 Aluminium | <b>Fire resistance</b>                | A1 No combustible |
| <b>Width (mm)</b>                            | 600               |                                       |                   |
| <b>Length (m)</b>                            | 3                 |                                       |                   |
| <b>kg/u</b>                                  | 2,530             |                                       |                   |

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC - Electrogalvanised Bichromate**

### BK8 - High Resistance Coating

**GC - Hot Dip Galvanising**

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

### PA12 - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Product applications

□