


PQW Straight Cover

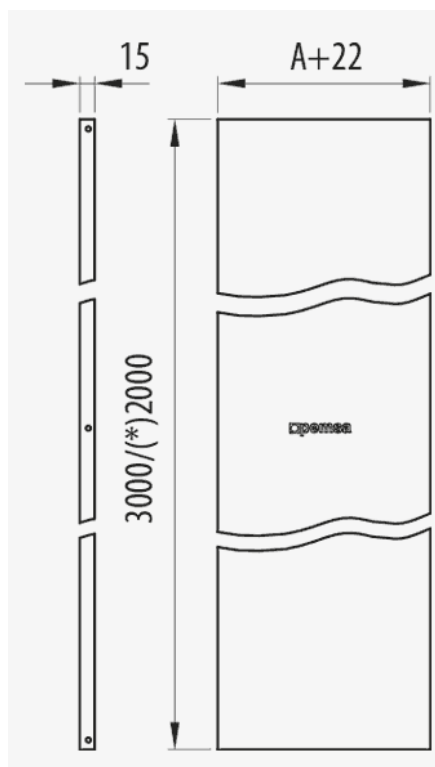

Description

Straight metal cover for the protection of the straight sections of the Pemsaband® PQW trays. Approved according to CEPSA and REPSOL specifications. Made of steel and with GC Protection System 85 microns thick.

Advantages

Optimum adjustment on the metal trays giving them a greater protection.

Easy and fast assembly system.

The sheet metal tray, plus the cover, becomes a protective trunking in grade IP2X.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Used for the protection of the Electrical and Telecommunications Wiring housed in Pemsaband® PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 GC

 Class 8

 100, 150, 200, 300, 400, 500, 600

 Steel with surface coating

 -50 / 150 °C

 A1 No combustible

ETIM 10

EC002403

Product data

		Ref	kg/u	
100	2	70393210	2,390	2
150	2	70393215	3,270	2
200	2	70393220	4,110	2
300	2	70393230	5,800	2
400	2	70393240	7,500	2
500	2	70393250	9,190	2
600	2	70393260	10,900	2
100	3	70393310	2,390	3
150	3	70393315	3,270	3
200	3	70393320	4,110	3
300	3	70393330	5,800	3
400	3	70393340	7,500	3
500	3	70393350	9,190	3
600	3	70393360	10,900	3

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene

Accessories PEMSABAND PQ
PQW Straight Cover

10/10/2026
3/3

- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."