


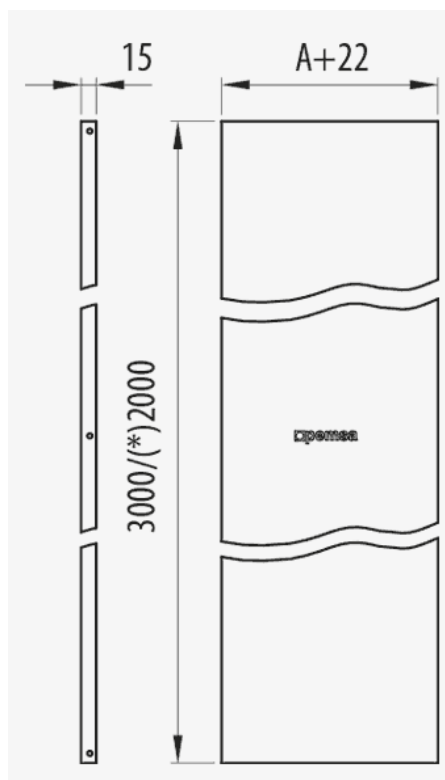

Description

Straight metal cover for the protection of the straight sections of the Pemsaband® PQW trays. Width 300 mm. Approved according to CEPSA and REPSOL specifications. Made of steel and with GC Protection System 85 microns thick.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

The sheet metal tray, plus the cover, becomes a protective trunking in grade IP2X.

Optimum adjustment on the metal trays giving them a greater protection.

Easy and fast assembly system.

Applications

Used for the protection of the Electrical and Telecommunications Wiring housed in Pemsaband® PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



Product data

ETIM 10	EC002403	kg/u	5,800
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	30,044	u	2
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 8	Fire resistance	A1 No combustible
Width (mm)	300		
Length (m)	2		

🔒 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

🏠 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

