
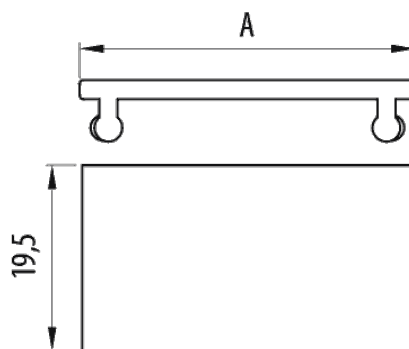


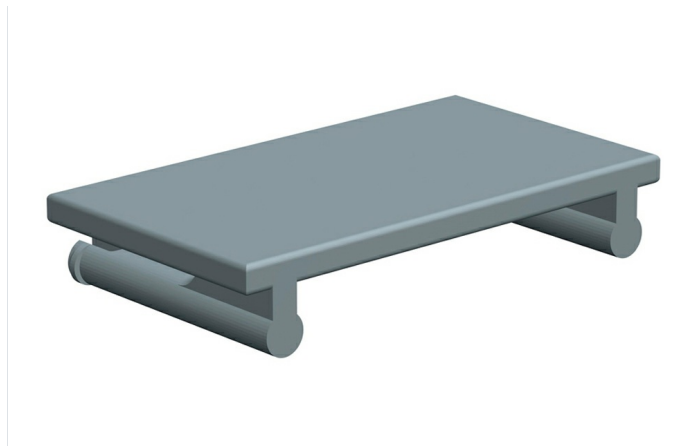

Description

Cover for the conduit clip of self-extinguishing polyamide 6 in grey colour RAL 7011 and black RAL 9005. Halogen-free, flame-retardant and available in various sizes. It ensures the fixing of the conduit to the support and facilitates the identification of the supports for flexible conduits in the Pemsaflex® range.

Advantages

Ensures the fixation of the conduit to the support and facilitates the identification.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Available in two colours: Grey RAL 7011 and black RAL 9005.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Working temperature: -25°C to + 105°C.

Applications

Suitable for fixing Pemsaflex®, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special facilities.

Solutions



Product data

ETIM 10	EC002320	u	50
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Polyamide 6
Colour	Grey RAL 7011	Working temperature range (°C)	-25 / 105 °C
DN	NW12	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
A (mm)	22		
kg/u	0,001		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

