
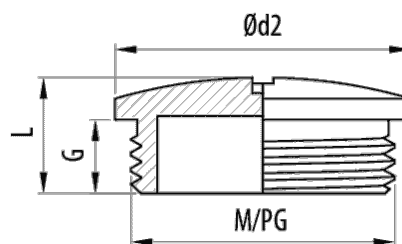


TPM Cap

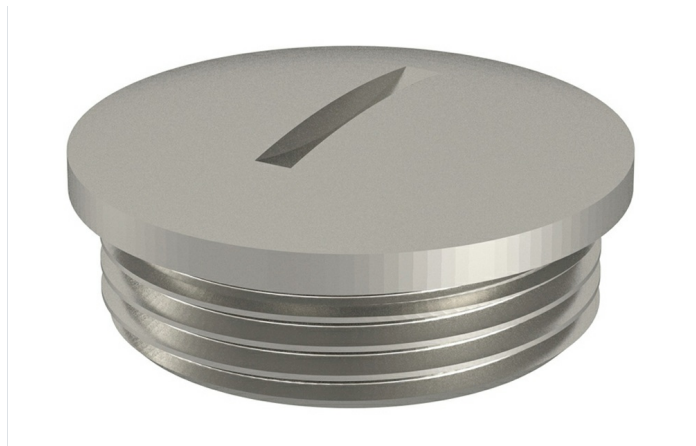

Description

TPM threaded metal plug with an IP68 index with the (not included) O-ring according to EN 60529. Available in metric thread from M12 to M63 and PG7 to PG48. Made of nickel-plated brass.

Advantages

Made of nickel-plated brass.

Protection index EN 60529: IP68 (with O-ring).

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Applications

Suitable for the capping of holes in boxes or electrical cabinets ensuring a degree of protection.

Solutions



Main technical characteristics

LTN	PG 7, PG 9, PG 11, PG 13, PG 16, PG 21, PG 29, PG 36, PG 42, PG 48, M12, M16, M20, M25, M32, M40, M50, M63	ETIM 10
LATÓN NIQUELADO,NBR	IP68	EC000032
-25 / 90 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Product data

			L _{mm}	Ref	kg/u	
PG 7	5.25	14	8	44010007	0,003	100
PG 9	6	17	9	44010009	0,005	100
PG11	6	20	9	44010011	0,007	100
PG13	6.5	22	9.5	44010013	0,009	100
PG16	6.5	24	9.5	44010016	0,011	100
PG21	7	30	11	44010021	0,021	100
PG29	8	39	12	44010029	0,019	50
PG36	9	50	15	44010036	0,018	25
PG42	10	57	16	44010042	0,030	25
PG48	10	64	16	44010048	0,023	10
M12	5	14	7	44011120	0,003	100
M16	6	18	8	44011160	0,005	100
M20	6.5	22	8.5	44011200	0,007	100
M25	7	27	10	44011250	0,011	100
M32	8	34	11	44011320	0,009	50
M40	9	44	13	44011400	0,009	25
M50	10	54	14.5	44011500	0,016	25
M63	10	67	15	44011630	0,191	10

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene

Caps

10/10/2026

TPM Cap

3/3

- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

