


TCP Nut

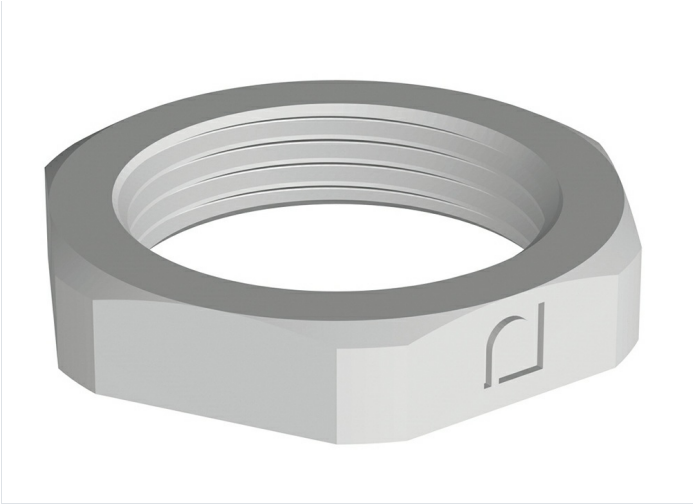

Description

Advantages

Applications

Solutions



Main technical characteristics

Colour	Grey RAL 7035	PG	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG42, PG48, M12, M16, M20, M25, M32, M40, M50, M63	ETIM 10	EC000940
Material	Polyamide 6	Temp	-25 / 105 °C	Libre de halógenos	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Product data

PG	h	Ø	Ref	kg/u	Q
PG 7	5	19	40020007	0,001	100
PG 9	5	22	40020009	0,002	100
PG11	5	24	40020011	0,001	100
PG13	6	27	40020013	0,002	100
PG16	6	30	40020016	0,003	100
PG21	7	36	40020021	0,003	100
PG29	7	46	40020029	0,006	50
PG36	8	60	40020036	0,013	25
PG42	8	65	40020042	0,013	25
PG48	8	70	40020048	0,014	25
M12	5	18	40021120	0,001	100
M16	5	22	40021160	0,001	100
M20	6	26	40021200	0,002	100
M25	6	32	40021250	0,005	100
M32	7	41	40021320	0,005	50
M40	7	50	40021400	0,007	25
M50	8	60	40021500	0,010	25
M63	8	75	40021630	0,016	25

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene

TCP Nut

- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

