


Clamp I (Ref: 39095600)

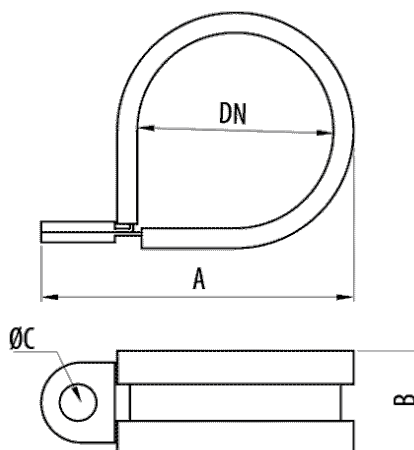

Description

Zinc plated steel clamp with elastomer profile for fixing conduits in cable management installations and for protection against vibrations. Available in different diameters.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Available in various sizes: NW7, NW9, NW11, NW13, NW16, NW21, NW29, NW36 and NW48.

The NBR elastomer profile dampens vibrations.

Manufactured in PG protection system steel with a NBR elastomer profile.

Working temperature: -25°C to + 100°C.

Applications

Suitable for the surface fixing of TFA, TM, TM-PVC, Ecoflex® flexible conduits and Pemsaflex® in the management of electrical cables for general applications, building, tertiary and industrial sectors.

Solutions



Product data

ETIM 10	EC011409	kg/u	0,233
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	30
Protection System	EZ	Material	ACERO CON PROT. SUPERFICIAL,NBR
Finish	EZ2, Electrogalvanised	Working temperature range (°C)	-25 / 120 °C
DN	NW29	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
A (mm)	60		
B (mm)	18		
Ø C (mm)	6.2		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

