
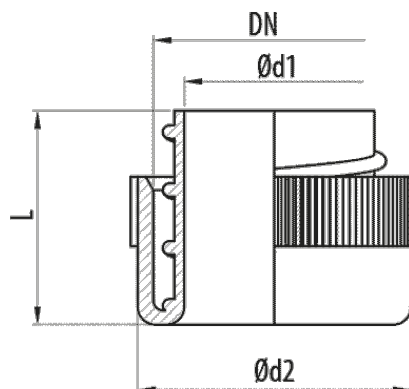


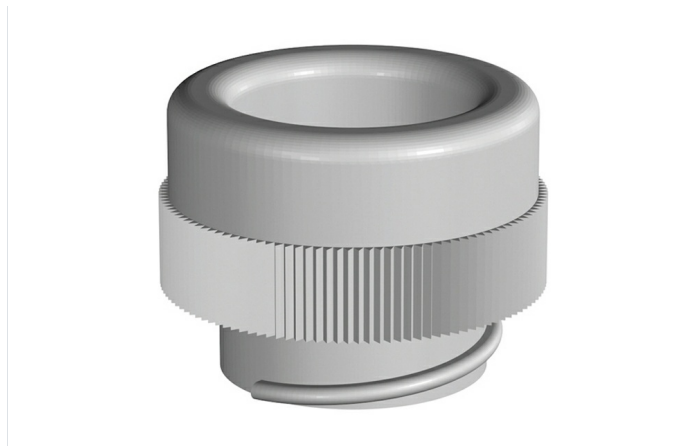

### Description

RP bush made of grey coloured polyethylene (RAL 7035) for protection of the ends of flexible conduits. Available in several sizes.

### Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made from polypropylene, halogen free.

It protects the end of metal conduits to avoid any damage in the exit of the cables.

### Applications

Suitable for placing on the ends of the TFA, TM, TM-PVC and Ecoflex® conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special installations.

### Solutions



## Product data

|                                              |               |                                       |                                              |
|----------------------------------------------|---------------|---------------------------------------|----------------------------------------------|
| <b>ETIM 10</b>                               | EC000519      | <b>u</b>                              | 100                                          |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> |               | <b>Material</b>                       | Polypropylene                                |
| <b>Colour</b>                                | Grey RAL 7035 | <b>IP</b>                             | IP54                                         |
| <b>DN</b>                                    | NW11          | <b>Working temperature range (°C)</b> | -25 / 90 °C                                  |
| <b>Ø d1 (mm)</b>                             | 12.1          | <b>Fire resistance</b>                | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |
| <b>Ø d2 (mm)</b>                             | 21.9          |                                       |                                              |
| <b>L (mm)</b>                                | 19.1          |                                       |                                              |
| <b>kg/u</b>                                  | 0,002         |                                       |                                              |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

