


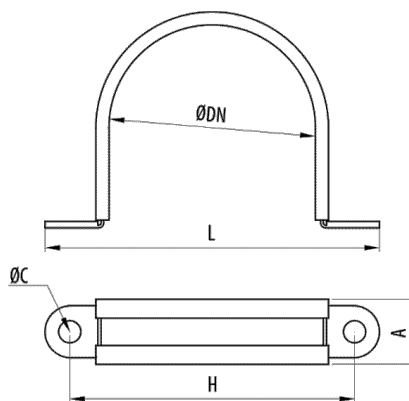

Description

Zinc plated steel clamp with elastomer profile for fixing Macroflex® NW70 and NW95 conduits that protects it from vibrations.

Advantages

Manufactured in PG protection system steel with a NBR elastomer profile.

Available in various sizes.

Working temperature: -25°C to + 90°C.

Protect from vibrations.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for fixing large diameter Pemsaflex® and Macroflex® conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special installations.

Solutions



Main technical characteristics

 EZ	 EZ2, Electrogalvanised	 DN NW70, NW95	 Amm 25	 10	 ACERO CON PROT. SUPERFICIAL,NBR
 -15 / 120 °C	 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA			ETIM 10 EC000127	

Product data

DN	L _(mm)	C _(mm)	H _(mm)	Ref	kg/u
NW70	131	8.2	112	33090270	0,059
NW95	150	8.3	132	33090295	0,075

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

