


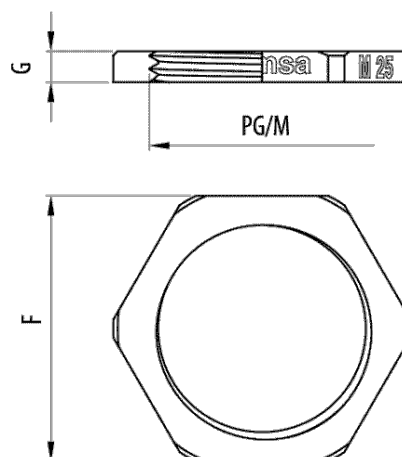

Description

Nickel-plated brass nut with metric or PG thread for connecting conduits, connectors and metal cable glands.

Advantages

Compatible with metric or PG metal threaded cable glands for all ranges of rigid and flexible conduits.

Working temperature: -45°C to + 150°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass.

Applications

Suitable for connection of threaded fittings of all ranges of rigid, flexible and metal conduits and metal cable glands for the management of electrical cables in building and industrial applications.

Solutions



Main technical characteristics

LTN	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG42, PG48, M12, M16, M20, M25, M32, M40, M50, M63	Nickel-plated brass
-45 / 150 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10 EC000940

Product data

			Ref	kg/u	
PG 7	2.8	15	40010007	0,002	100
PG 9	2.8	18	40010009	0,002	100
PG11	3	21	40010011	0,003	100
PG13	3	23	40010013	0,003	100
PG16	3	26	40010016	0,005	100
PG21	3.5	32	40010021	0,007	100
PG29	4	41	40010029	0,012	50
PG36	5	51	40010036	0,019	25
PG42	5	60	40010042	0,029	25
PG48	5.5	64	40010048	0,030	25
M12	2.8	15	40011120	0,002	100
M16	2.8	19	40011160	0,003	100
M20	3	24	40011200	0,004	100
M25	3.5	30	40011250	0,007	100
M32	4	36	40011320	0,010	50
M40	5	46	40011400	0,020	25
M50	5	60	40011500	0,028	25
M63	6	70	40011630	0,046	25

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



TCM Nut

- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

